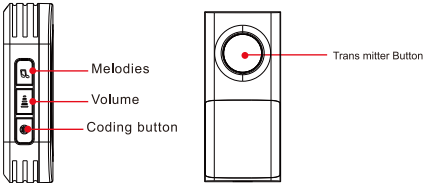

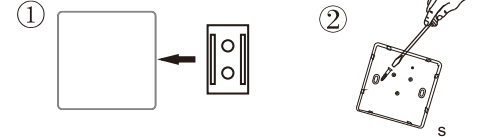

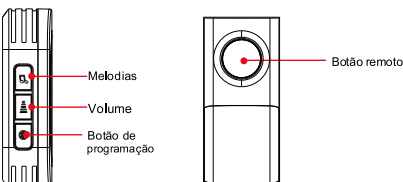

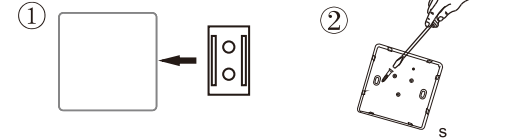


 light your business Wireless Doorbell User Guide e25.B	Thanks for buying this door bell The main advantages of this prodouct are as below: 1. Transmitter with Button Battery . 2. Coding Free. 3. Easy Usage . 4. Easy Installation. 5. 58 Chime Tone. 6. 500ft working distance. 7. 4 Level of ring volume. 8. IP55 waterproof class for transmitter. 9. 4 working modes of ring & flashing light. 10. Memory function to store the current melody and volume,it will remain the same settings after the receiver relocated. Operating Modes: By pressing the "Coding Button" to switch from below 4 modes: 1.Ringing + Flashing light. 2.Ringing only. 3.Flashing light only. 4.Ringing +Lighting all the time(Work as a night light). Doorbell is well-paired & ready for using when recieving. If need to pair new transmitter, please follow the "How to pair" .	How to pair :  a. press the "Coding button" for 5 seconds until heard "Bird Singing" sound. b. Then press the "Transmitter button" twice within 5 seconds after heard "Bird Singing". If the doorbell ring, pairing is successful. c. Test to make sure it was paired successfully, if not please repeat step a & b . How to delete pairing : 	a. Please delete "Pairing" if need to change / add transmitter. b. Put 3*AAA batteryin the Receiver c. Press the "Coding button" for 10 seconds untill hear the "Dingdong" sound. Previous pairing was deleted. How to install: Open the transmitter by flat Screwdriver,take out the battery insulation film   3. Insert the batteries inside of the unit	Cautions: ◆ Please do not open PCB or repair it without professional guide in order to avoid breakdown of components ◆ Please make sure it is not exposed to the sun and rain for a long time or closed to the metallic object ◆ Operating range may be affected by environmental factors and nearby interference sources ◆ Proper use will prolong life span of wireless doorbell effectively. Technical Specifications: ◆ Working frequency: 433MHz ◆ Receiver Rated voltage: 3*AAA Battery ◆ Receiver Standby current: <5mA ◆ Receiving sensitivity: -107dBm ◆ Power Consumption of transmitter: <10mw	 light your business  Made in China
 light your business Campainha sem fios Guia do utilizador e25.B	Obrigado por comprar a campainha sem fios e25.B As principais vantagens deste produto são: 1.Botão transmissor com bateria 2.Codificação livre 3.Fácil de utilizar 4.Fácil instalação 5.58 melodias 6.Alcance aproximado 150 Metros 7.4 níveis de volume 8.Botão IP55 9.4 modos de funcionamento com melodias flashes de luz 10.Memoria de armazenamento para guardar a melodia e volume, de forma a manter a programação sempre que mudar o recetor de local. Modos de funcionamento: 1.Toque + flashes de luz. 2.Toque 3.Flashes de luz. 4.Toque + luz (Pode funcionar como luz noturna). A campainha esta pronta a utilizar, se necessitar de emparelhar com um novo transmissor, por favor consulte "Como emparelhar os dispositivos".	Como emparelhar os dispositivos:  a.Ligue o recetor a uma tomada e pressione o "botão de programação" durante 5 segundos até ouvir a melodia "Bird singing". b.Pressione "Botão remoto" duas vezes no espaço de 5 segundos depois de ouvir a melodia "Bird singing". Se a campainha sem fios tocar o emparelhamento foi efetuado com sucesso. c.Teste para ter a certeza que o emparelhamento foi efetuado com sucesso, senão por favor repita os passos a & b novamente. Como apagar emparelhamento: 	a.Por favor apague o emparelhamento se necessitar de substituir ou adicionar um novo transmissor. b.Ligue o recetor a comente. c.Mantenha pressionado o botão de programação durante 10 segundos ate ouvir o som "Dingdong". A antiga programação foi apagada. Instalação: Abra o transmissor com uma chave de fenda, retire o isolamento das baterias   3.Insira as pilhas na unidade	Precauções: ◆ Por favor, não abra a PCB ou tente reparar-la sem a ajuda de um profissional para evitar a quebra de componentes ◆ Certifique-se de que não está exposto ao sol e chuva por um longo período de tempo ou fechado dentro de um componente metálico ◆ O alcance pode ser afetado por fatores ambientais e fontes de interferência nas proximidades ◆ O uso adequado prolongará a vida útil da campainha sem fios Especificações técnicas: ◆ Frequência de funcionamento: 433MHz ◆ Tensão funcionamento do recetor: 3*AAA pilhas ◆ Corrente do recetor em standby: <5mA ◆ Sensibilidade: - 107 dBm ◆ Consumo do transmissor: < 10mw	 light your business  Made in China