

TECHNICAL INFORMATIONS

PROJETOR LED POLICARBONATO

20W 6000K BLACK IP65

Série profissional de projetores IP65 com 94% de eficiência luminosa, corpo em policarbonato, vidro temperado de alta qualidade que resiste ao impacto e ao atrito.

Professional floodlight series with 94% luminous efficiency, polycarbonate body, high quality tempered glass that resist the impact and friction.

Serie profesional de proyectores IP65 con un 94% de eficiencia luminosa, cuerpo de policarbonato,, vidrio templado de alta calidad que resiste el impacto y la fricción.




ILAR-00936


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00936	Size Piece	166x158x31mm	Total Luminous Flux	1800lm
Led Type	Epistar LED	Weight Piece	-	Luminous Efficacy	90lm/W
Body Material	ABS + PC	Item Volume	-	Beam Angle	120°
Body Colour	Black	Itens per Pack	1	Colour Temperature	6000K
Nominal Lifetime	50000h	Itens per Box	40 pcs / carton	Colour Rendering Index	>80
Dimmable	No			Colour Stability	<6
Cable Size	50cm				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	20W	Energy Label	A+	CE Directive	YES
Nominal Voltage	AC220-240V	Energy Consumption KWH/1000H	6KWH	ROHS	YES
ON/OFF Cycles	-	Type of Protection	IP65	ENEC	YES
Operating Frequency	50/60Hz	Protection Class	Class I	Warranty	2 YEARS
Power Factor	>0.95	Proteccion Class IK (shock resistance)	IK06		
Operating Temperature	- 30° C to + 40° C				
Power Supply	DOB				

SIZE

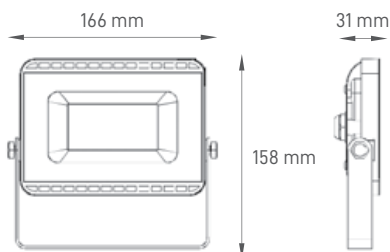

BEAM ANGLE



Designed by Aronlight in Portugal. Made in PRC

