

TECHNICAL INFORMATIONS

MELLER QUADRADO

3W CCT BRANCO

Luminária exterior de parede com design moderno, chips LED de elevada reprodução, alumínio de fundição injetada, elevados níveis de proteção (IP65 e IK06) e forte resistência à corrosão.

Exterior wall luminaire with a modern design, high-reproduction LED chips, die-cast aluminum, high levels of protection (IP65 and IK06) and strong corrosion resistance.


Lámpara de pared exterior de diseño moderno, chips LED de alta reproducción, aluminio fundido a presión, altos niveles de protección (IP65 e IK06) y gran resistencia a la corrosión.



ILAR-01056

| REFERENCE | | DIMENSION & WEIGHT | | PHOTOMETRICAL DATA | |
|------------------------------------|-------------------|--|----------------|----------------------------|--------------------------|
| Reference | ILAR-01056 | Width | 85x85mm | Total Luminous Flux | 120lm |
| LED Brand | Epistar LED | Height | 4mm | Luminous Efficacy | 40lm/W |
| Body Material | Die-cast Aluminum | Packaging Unit | 6 pcs / carton | Beam Angle | 38° |
| Housing Colour | White | Base (ILAR-01050) | | Colour Temperature | Switch 3000K/4000K/6000K |
| Nominal Lifetime (EOL end of life) | 25000H | Width | Ø79x54mm | Colour Rendering Index | >80 |
| Mounting Type | Recessed | Cut-out | Ø59mm | | |
| Body Shape | Square | | | | |
| ELECTRICAL AND OPERATING DATA | | ENERGY LABEL & STANDARS | | CERTIFICATIONS | |
| Nominal Wattage | 3W | Energy Label | A+ | 2014/30/EU (EMC Directive) | YES |
| Nominal Voltage | AC175~265V | Energy Consumption KWH/1000H | 3kwh | 2014/35/EU (LVD Directive) | YES |
| Operating Frequency | 50/60Hz | Type of Protection | IP65 | ROHS | YES |
| Operating Temperature | - 25°C to + 45°C | Protection Class | Class II | Warranty | 3 YEARS |
| Starting Time 100% ON | <0.5s | Protection Class IK (shock resistance) | IK06 | | |
| ON/OFF Cycles | >25000 | | | | |

SIZE

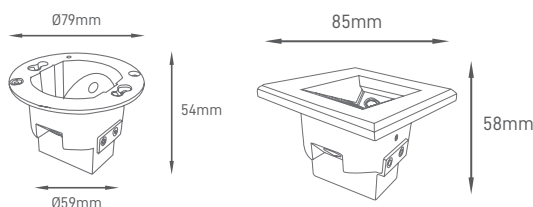

Designed by Aronlight in Portugal. Made in PRC

