

TECHNICAL INFORMATIONS

PAINEL ENCASTRAR QUADRADO

24W 4000K BRANCO

Panel de Encastrar e Superfície, ideal para tectos falsos com altura limitada.

Recessed and Surface Panel, ideal for dropped ceiling with limited height.

Panel de Encastrar y Superfície, ideal para techos falsos con altura limitada.

ILAR-00756



REFERENCE

Led Type	SMD
Mounting Type	Recessed
Body Material	Aluminium
Housing Colour	White
Body Shape	Square
LGP	PS
LED Brand	25000hrs
Useful Lifetime Based on LM70	Samsung LED
Dimmable	-
	No

DIMENSION & WEIGHT

Lenght	300mm
Width	300mm
Height	20mm
Weight	0.835kg
Cut-Out	280x280mm

PHOTOMETRICAL DATA

Total Luminous Flux	2130lm
Luminous Efficacy	90lm/w
Beam Angle	120°
Colour Temperature	4000k
Colour Rendering Index	>80
Colour Consistency	<= 6
UGR	

ELECTRICAL AND OPERATING DATA

Nominal Wattage	24W
Nominal Voltage	85-265V
Operating Frequency	50/60Hz
Power Factor	0.9
Operating Temperature	- 20° C to + 40° C


ENERGY LABEL & STANDARS

Energy Label	A+
Energy Consumption KWH/1000H	24kwh
Type of Protection	IP40
Protection Class	II
Proteccion Class IK (shock resistance)	-

CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
ENEC	YES
Warranty	2 YEARS

SIZE

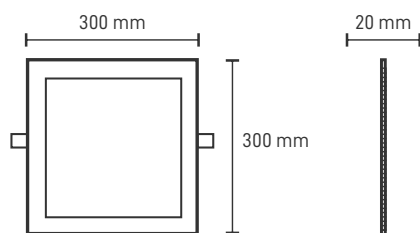

BEAM ANGLE

Designed by Aron Light in Portugal. Made in PRC

