

**Your Wiper robot
will be well protected
by My Robot Home**



Step 3

Check the passage of the door





After assembly, there must be no friction between the structure and the door to prevent the robot from getting stuck inside.

If necessary, adjust... My robot home is now ready.



Step 2

Adjust the movement of the balance

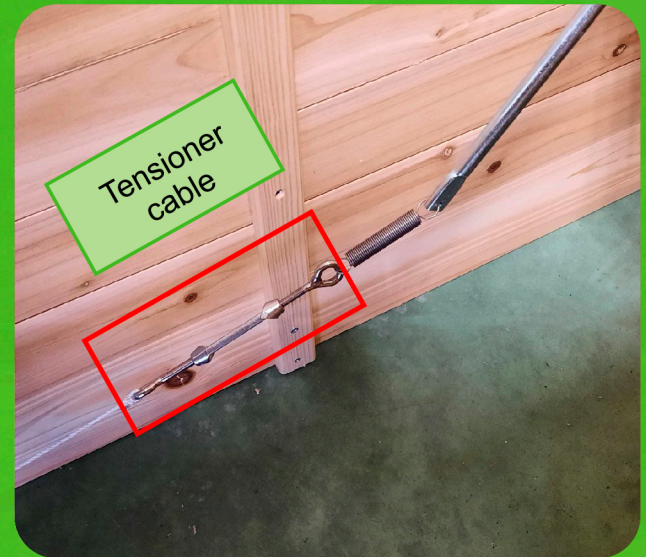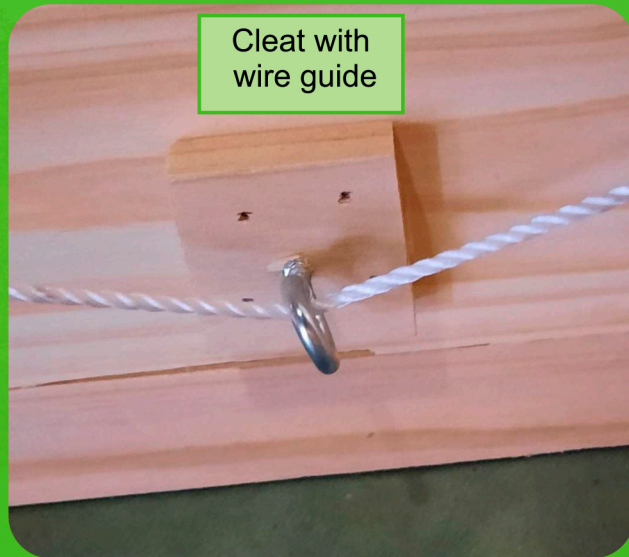


- 1 - Undo the nylon cable from the door
- 2 - Remove the thread grommet on the cleat
- 3 - Remove the cable tensioner

- 4 - Hook the nylon cable directly onto the spring
- 5 - Adjust the movement of the door and hook the cable permanently on the door



Step 1

Add a notch on each side

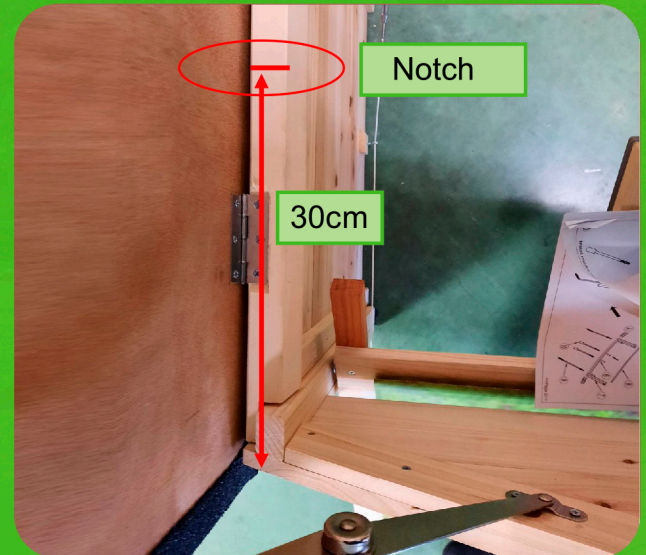

Tutorial to adapt in 3 steps garages with door automatic My robot home Auto-MOW to robots WIPER F and K series

*Also valid for robots
Ambrogio (4.0 & L250 series)
Tech (Bx4, Lx4 and 25 series)*

