

TECHNICAL INFORMATIONS


FITA LED COB PRO IP20

15W 2700K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

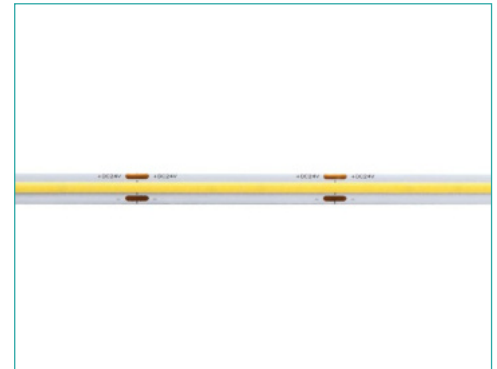

ILAR-01401

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01401	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	10mm	Luminous Efficacy	1500lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	2700K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATIONS

FITA LED COB PRO IP20

15W 4000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01402

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01402	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	10mm	Luminous Efficacy	1500lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATIONS

FITA LED COB PRO IP20

15W 6000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01403

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01403	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	10mm	Luminous Efficacy	1500lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	6000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FITA LED COB PRO IP67

15W 2700K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01404

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01404	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	10mm	Luminous Efficacy	1500lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	2700K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FITA LED COB PRO IP67 15W 4000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01405

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01405	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	10mm	Luminous Efficacy	1500lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FITA LED COB PRO IP67

15W 6000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-02508

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02508	Length	5000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	12mm	Luminous Efficacy	1453lm/mt
Type LED	COB	Tape	3M	LED/MT	480
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC

