



TECHNICAL INFORMATIONS


FITA LED PROSTRIP 50M IP65

15W 3000K

Linha de Fitas LED com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

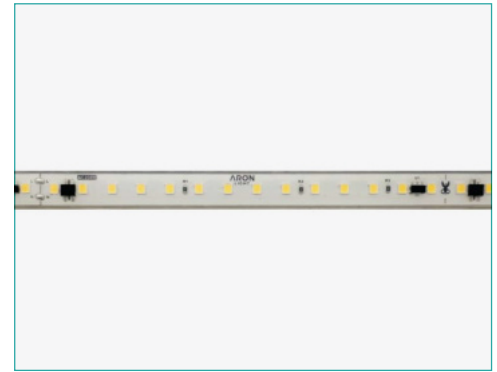

ILAR-01407

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01407	Length	50000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	12mm	Luminous Efficacy	1700lm/mt
Type LED	SMD 2835	Tape	3M	LED/MT	112
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	100mm	Beam Angle	120°
				Colour Temperature	3000K
				Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP65	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	230V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FITA LED PROSTRIP 50M IP65

15W 4000K

Linha de Fitas LED com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01408

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01408	Length	50000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	12mm	Luminous Efficacy	1700lm/mt
Type LED	SMD 2835	Tape	3M	LED/MT	112
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	125mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP65	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	230V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FITA LED PROSTRIP 50M IP65

15W 6000K

Linha de Fitas LED com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.



ILAR-01409

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01409	Length	50000mm	Total Luminous Flux	-
Type	LED ProStrip	Width	12mm	Luminous Efficacy	1700lm/mt
Type LED	SMD 2835	Tape	3M	LED/MT	112
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	100mm	Beam Angle	120°
				Colour Temperature	6000K
				Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	15W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP65	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	230V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	>0.95				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC

