




## TECHNICAL INFORMATIONS

# AURA CIRCULAR

## 43W 3000K

Luminária de decoração contemporânea com design circular e possibilidade de instalação no teto ou em suspensão. Os módulos básicos podem constituir luminárias circulares padrão com o diâmetro de 0.8m / 1.5m / 3.0m para aplicação independente. Ideal para criar diferentes ambientes, adaptando-se na perfeição a diferentes tipos de espaços como hotéis, cafés, restaurantes ou aeroportos.

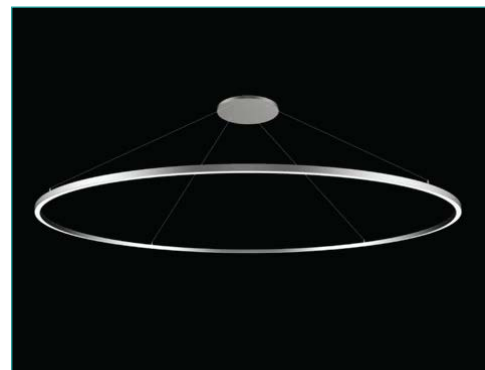


### ILAR-01424


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01424	Lenght	Ø800mm	Total Luminous Flux	3870lm
Led Type	COB	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Surface / Suspended	Height	-	Beam Angle	120°
Body Material	Aluminium	Weight	-	Colour Temperature	3000K
Housing Colour	Grey	Packaging Unit	Carton box 1 pc	Colour Rendering Index	>80
Body Shape	-	Gross Weight	8.5kg		
Nominal Lifetime (EOL end of life)	50.000H	Volume	-		
Dimmable	NO				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARDS		CERTIFICATIONS	
Nominal Wattage	43W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	43kWh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP42	CE	YES
Power Factor	>0.9	Protection Class	Class II	ROHS	YES
Operating Temperature	- 30°C to + 40°C	Protecion Class IK (shock resistance)	IK03	Warranty	3 YEARS
Starting Time 100% ON	0.0001 s				
ON/OFF Cycles	>25000				

### SIZE

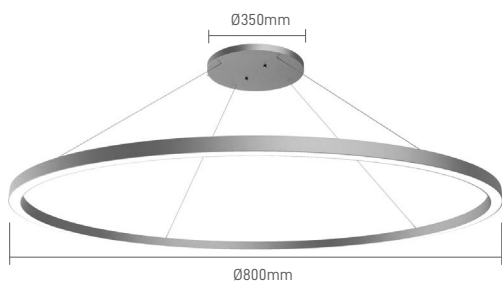

### BEAM ANGLE

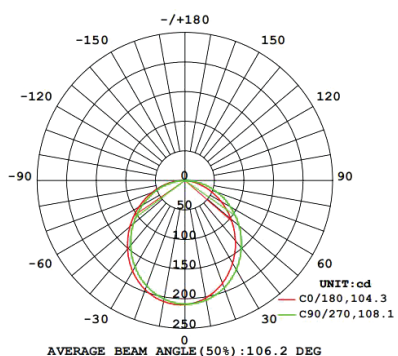

Designed by Aron Light in Portugal. Made in PRC




## TECHNICAL INFORMATIONS

# AURA CIRCULAR

## 105W 3000K

Luminária de decoração contemporânea com design circular e possibilidade de instalação no teto ou em suspensão. Os módulos básicos podem constituir luminárias circulares padrão com o diâmetro de 0.8m / 1.5m / 3.0m para aplicação independente. Ideal para criar diferentes ambientes, adaptando-se na perfeição a diferentes tipos de espaços como hotéis, cafés, restaurantes ou aeroportos.

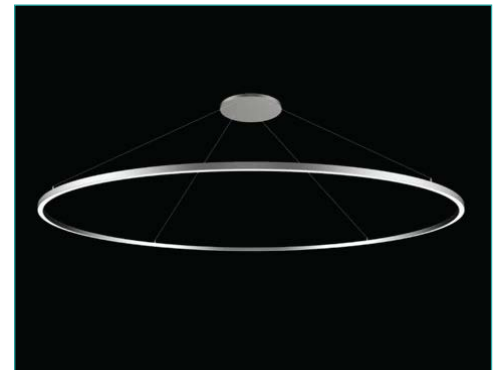



### ILAR-00180

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00180	Lenght	Ø1535mm	Total Luminous Flux	9500lm
Led Type	COB	Width	Ø1465mm	Luminous Efficacy	90lm/w
Mounting Type	Surface / Suspended	Height	-	Beam Angle	120°
Body Material	Aluminium	Weight	-	Colour Temperature	3000K
Housing Colour	Grey	Packaging Unit	Carton box 1 pc	Colour Rendering Index	>80
Body Shape	-	Gross Weight	8.5kg		
Nominal Lifetime (EOL end of life)	50.000H	Volume	-		
Dimmable	NO				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARDS		CERTIFICATIONS	
Nominal Wattage	105W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	105 kWh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP42	CE	YES
Power Factor	>0.9	Protection Class	Class II	ROHS	YES
Operating Temperature	- 30°C to + 40°C	Protection Class IK (shock resistance)	IK03	Warranty	3 YEARS
Starting Time 100% ON	0.0001 s				
ON/OFF Cycles	>25000				

### SIZE

### BEAM ANGLE

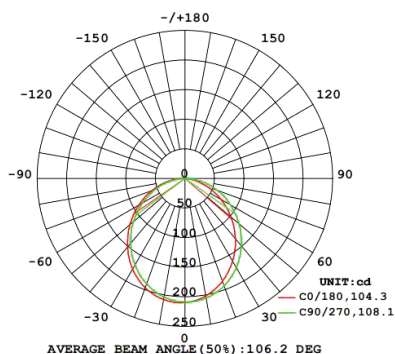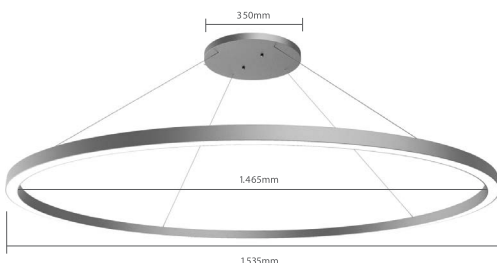

Designed by Aron Light in Portugal. Made in PRC




## TECHNICAL INFORMATIONS

# AURA CIRCULAR

## 162W 3000K

Luminária de decoração contemporânea com design circular e possibilidade de instalação no teto ou em suspensão. Os módulos básicos podem constituir luminárias circulares padrão com o diâmetro de 0.8m / 1.5m / 3.0m para aplicação independente. Ideal para criar diferentes ambientes, adaptando-se na perfeição a diferentes tipos de espaços como hotéis, cafés, restaurantes ou aeroportos.

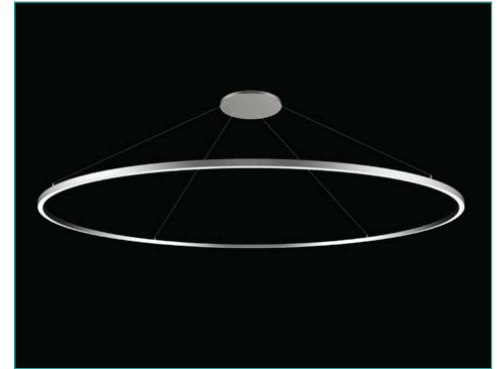


### ILAR-01423


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01423	Lenght	Ø3000mm	Total Luminous Flux	14580lm
Led Type	COB	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Surface / Suspended	Height	-	Beam Angle	120°
Body Material	Aluminium	Weight	-	Colour Temperature	3000K
Housing Colour	Grey	Packaging Unit	Carton box 1 pc	Colour Rendering Index	>80
Body Shape	-	Gross Weight	8.5kg		
Nominal Lifetime (EOL end of life)	50.000H	Volume	-		
Dimmable	NO				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARDS		CERTIFICATIONS	
Nominal Wattage	162W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	162kWh	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP42	CE	YES
Power Factor	>0.9	Protection Class	Class II	ROHS	YES
Operating Temperature	- 30°C to + 40°C	Protection Class IK (shock resistance)	IK03	Warranty	3 YEARS
Starting Time 100% ON	0.0001 s				
ON/OFF Cycles	>25000				

### SIZE

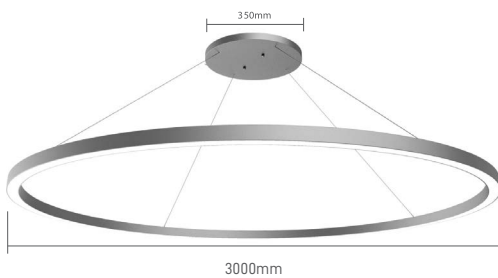

### BEAM ANGLE

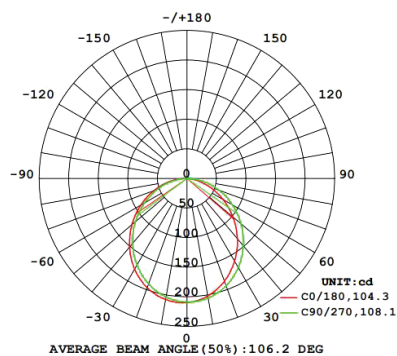

Designed by Aron Light in Portugal. Made in PRC

