

TECHNICAL INFORMATION

LOKI

8W 2700K BRANCO

Downlight dimável de encastrar em alumínio ADC12 com ótima dissipação de calor, anticorrosão e proteção IP54. Alta eficiência (Cob 120lm/w) e fácil instalação através do seu conector rápido.

Dimmable Recessed Downlight with made of ADC12. Aluminium with great heat dissipation, anti corrosion and IP54 Protection. High in efficiency (Cob 120lm/w) and easy in installation as it comes with fast connector.

Downlight Empotrable Regulable fabricado en Aluminio ADC12 de gran disipación de calor, anticorrosión y Protección IP54. Alta eficiencia (Cob 120lm / w) y fácil instalación ya que viene con conector rápido.




ILAR-00994


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00994	Lenght	Ø95mm	Total Luminous Flux	640lm
Led Type	Edson	Width	-	Luminous Efficacy	80lm/w
Mounting Type	Recessed	Height	36.5mm	Beam Angle	60°
Body Material	Aluminum	Cutout	Ø83mm	Colour Temperature	2700K
Housing Colour	White RAL9016	Packaging Unit	-	Colour Rendering Index	>80
Body Shape	Round	Gross Weight	-	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Volume	-	UGR	-
Dimmable	YES				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	8W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP54	ROHS	YES
Power Factor	≥0.9	Protection Class	II	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

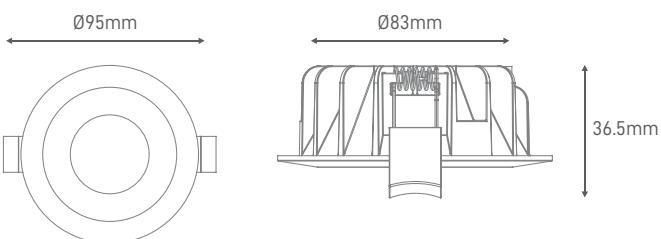

BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC



TECHNICAL INFORMATION

LOKI

8W 4000K BRANCO

Downlight dimável de encastrar em alumínio ADC12 com ótima dissipação de calor, anticorrosão e proteção IP54. Alta eficiência (Cob 120lm/w) e fácil instalação através do seu conector rápido.

Dimmable Recessed Downlight with made of ADC12. Aluminium with great heat dissipation, anti corrosion and IP54 Protection. High in efficiency (Cob 120lm/w) and easy in installation as it comes with fast connector.

Downlight Empotrable Regulable fabricado en Aluminio ADC12 de gran disipación de calor, anticorrosión y Protección IP54. Alta eficiencia (Cob 120lm / w) y fácil instalación ya que viene con conector rápido.




ILAR-00995


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00995	Lenght	Ø95mm	Total Luminous Flux	640lm
Led Type	Edson	Width	-	Luminous Efficacy	80lm/w
Mounting Type	Recessed	Height	36.5mm	Beam Angle	60°
Body Material	Aluminum	Cutout	Ø83mm	Colour Temperature	4000K
Housing Colour	White RAL9016	Packaging Unit	-	Colour Rendering Index	>80
Body Shape	Round	Gross Weight	-	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Volume	-	UGR	-
Dimmable	YES				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	8W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP54	ROHS	YES
Power Factor	≥0.9	Protection Class	II	ENEC	-
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

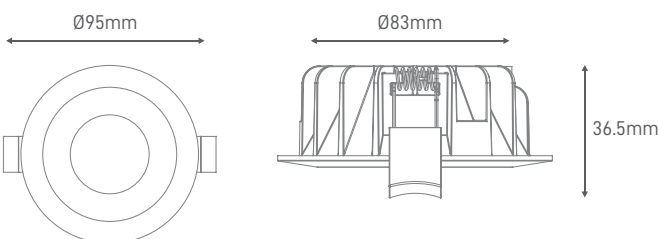

BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

