

TECHNICAL INFORMATION

PAINEL LED 150X30

40W 4000K BRANCO

Painel branco com design discreto, uma combinação perfeita de elegância e simplicidade.

White panel with smooth design, a perfect combination of elegance and simplicity.

Panel blanco de líneas suaves, una perfecta combinación entre elegancia y simplicidad.


ILAR-01110




REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	SMD	Lenght	1500mm	Total Luminous Flux	4000lm
Mounting Type	Recessed	Width	300mm	Luminous Efficacy	100lm/W
Body Material	Aluminium	Height	10mm	Beam Angle	120°
Housing Colour	White	Weight	-	Colour Temperature	4000K
LGP	PMMA	Cut-Out	-	Colour Rendering Index	>80
Nominal Lifetime (LM80)	50000h			UGR	<21
Dimmable	Optional				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	40W	Type of Protection	IP44	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK03	ROHS	YES
Power Factor	0.9			Warranty	2 YEARS
Operating Temperature	- 10° C to + 40° C				

SIZE

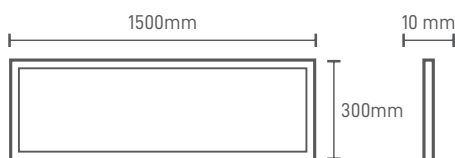

BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

