

TECHNICAL INFORMATION

LYNX MODULAR 3CCT

15W WHITE

Luminária Linear de encastrar, possibilidade de mudança de temperatura de cor por DIP Switch. Este modelo foi elaborado com a possibilidade de conexão para formar linhas contínuas de iluminação.

Recessed Led Linear Luminaire. Color temperature switchable by DIP switch. It can be linked with seamless connection to form unique lighting continuous lines.

Luminaria Lineal Led de Empotrar, posibilidad de cambio de temperatura de color por DIP Switch. Este modelo fue elaborado con la posibilidad de conexión para formar líneas continuas de iluminación




ILAR-01583

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01583	Length	615x62x29mm	Total Luminous Flux	1400-1600lm
LED Brand	-	Width	-	Luminous Efficacy	110-120lm/w
Mounting Type	Recessed	Height	-	Beam Angle	110°
Body Material	Aluminium	Weight	-	Colour Temperature	3000K-4000K-5700K
Housing Colour	White RAL9016	Cutout	607x54mm	Colour Rendering Index	>80
Body Shape	Rectangular	Packaging Unit	1pc/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<19
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	15W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP40	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK07		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	100000				

SIZE

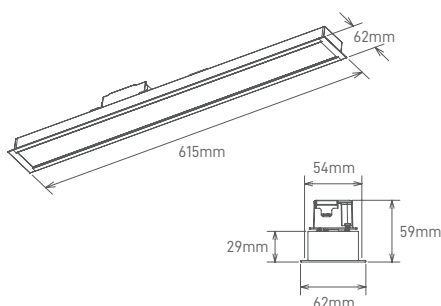

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

LYNX MODULAR 3CCT

30W WHITE

Luminária Linear de encastrar, possibilidade de mudança de temperatura de cor por DIP Switch. Este modelo foi elaborado com a possibilidade de conexão para formar linhas contínuas de iluminação.

Recessed Led Linear Luminaire. Color temperature switchable by DIP switch. It can be linked with seamless connection to form unique lighting continuous lines.

Luminaria Lineal Led de Empotrar, posibilidad de cambio de temperatura de color por DIP Switch. Este modelo fue elaborado con la posibilidad de conexión para formar líneas continuas de iluminación




ILAR-01584

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01584	Lenght	1208x62x29mm	Total Luminous Flux	3100-3400lm
LED Brand	-	Width	-	Luminous Efficacy	110-120lm/w
Mounting Type	Recessed	Height	-	Beam Angle	110°
Body Material	Aluminium	Weight	-	Colour Temperature	3000K-4000K-5700K
Housing Colour	White RAL9016	Cutout	1201x54mm	Colour Rendering Index	>80
Body Shape	Rectangular	Packaging Unit	1pc/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<19
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	30W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP40	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK07		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	100000				

SIZE

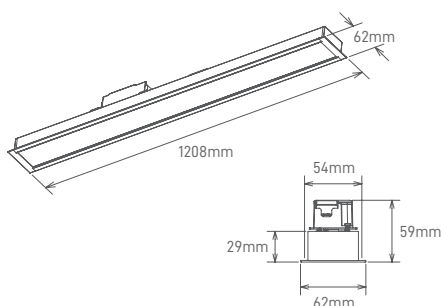

Designed by Aronlight in Portugal. Made in PRC

