

## TECHNICAL INFORMATIONS

# TUBO NEON 360°

## 20W 2700K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.




### ILAR-01692

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01692	Length	5000mm	Luminous Efficacy	1320lm/M
Type	LED Tube	Width	Ø25mm	LM/W	66lm/W
Type LED	SMD2835	Tape	-	Beam Angle	360°
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Colour Temperature	2700K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	20W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

### SIZE

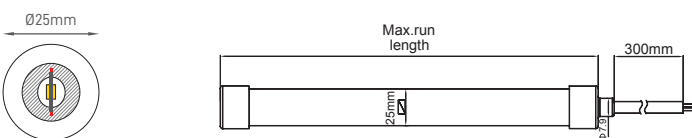

### ACCESSORIES



CAPS  
ILAR-01694



CLIP  
ILAR-01695

Designed by Aronlight in Portugal. Made in PRC



## TECHNICAL INFORMATIONS


# TUBO NEON 360°

## 20W 4000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

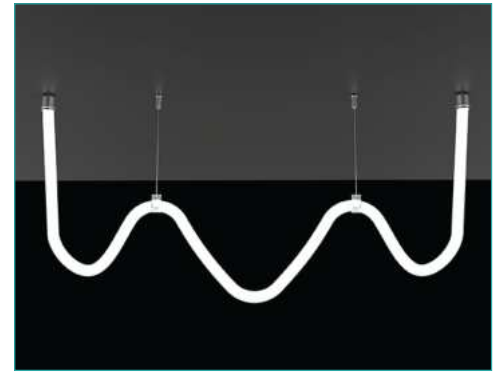


### ILAR-01693

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01693	Length	5000mm	Luminous Efficacy	1495lm/M
Type	LED Tube	Width	Ø25mm	LM/W	73lm/W
Type LED	SMD2835	Tape	-	Beam Angle	360°
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	20W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

### SIZE



### ACCESSORIES



CAPS  
ILAR-01694



CLIP  
ILAR-01695

Designed by Aronlight in Portugal. Made in PRC



## TECHNICAL INFORMATIONS

# TUBO NEON 360°

## 20W 2700K 10M

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.




### ILAR-02304

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02304	Length	10000mm	Luminous Efficacy	1320lm/M
Type	LED Tube	Width	Ø25mm	LM/W	66lm/W
Type LED	SMD2835	Tape	-	Beam Angle	360°
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Colour Temperature	2700K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	20W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

### SIZE

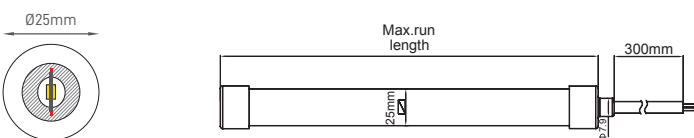

### ACCESSORIES



CAPS  
ILAR-01694



CLIP  
ILAR-01695

Designed by Aronlight in Portugal. Made in PRC



## TECHNICAL INFORMATIONS


# TUBO NEON 360°

## 20W 4000K 10M

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

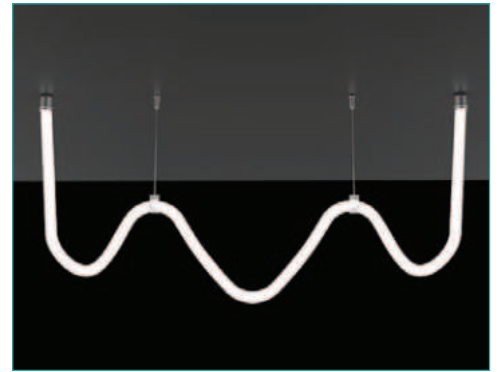


### ILAR-01693

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01693	Length	10000mm	Luminous Efficacy	1495lm/M
Type	LED Tube	Width	Ø25mm	LM/W	73lm/W
Type LED	SMD2835	Tape	-	Beam Angle	360°
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	20W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

### SIZE



### ACCESSORIES



CAPS  
ILAR-01694



CLIP  
ILAR-01695

Designed by Aronlight in Portugal. Made in PRC

