

## TECHNICAL INFORMATIONS


# TUBO NEON 160°

## 10W RGB

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

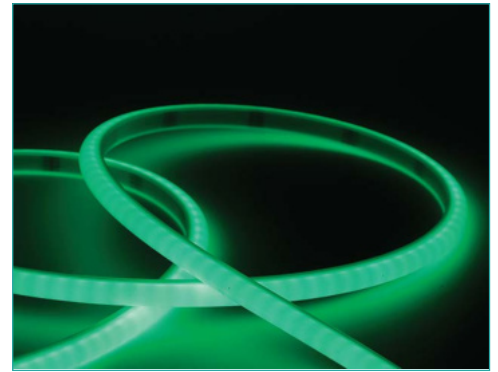



### ILAR-01698

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01698	Length	5000mm	Luminous Efficacy	850Lm/M
Type	LED Tube	Width	13x12mm	LED / MT	140LEDs/W
Type LED	SMD2835	Tape	-	LM/W	71-85Lm/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	160°
				Colour Temperature	RGB
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	10W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

### SIZE

### ACCESSORIES

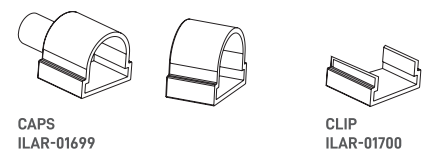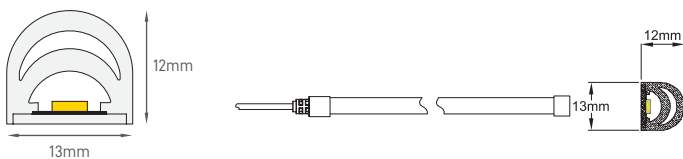

Designed by Aronlight in Portugal. Made in PRC



## TECHNICAL INFORMATIONS


# TUBO NEON 160°

## 10W RGB 10M

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

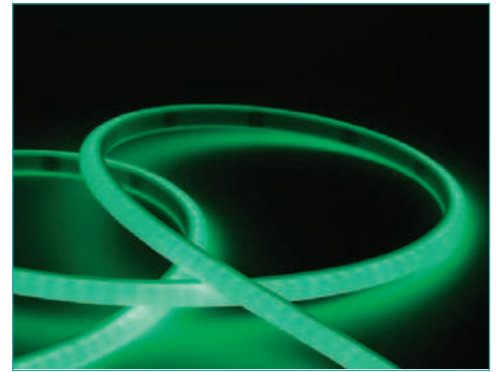


### ILAR-02306


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02306	Length	10000mm	Luminous Efficacy	850Lm/M
Type	LED Tube	Width	13x12mm	LED / MT	140LEDs/W
Type LED	SMD2835	Tape	-	LM/W	71-85Lm/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	50mm	Beam Angle	160°
				Colour Temperature	RGB
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	10W	Type of Protection	IP67	CE	YES
Equivalent Wattage	-			ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				


### SIZE

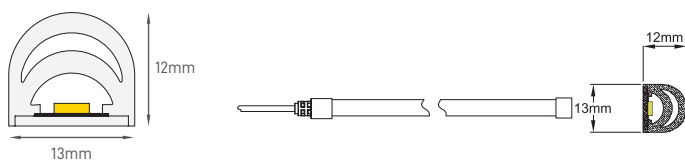

### ACCESSORIES



CAPS  
ILAR-01699



CLIP  
ILAR-01700

Designed by Aronlight in Portugal. Made in PRC

