

## TECHNICAL INFORMATIONS


# LYRA

## 10W 2700K BRANCO

Aplique de parede com dupla emissão de Luz e possibilidade de regulação dos ângulos de abertura (0°-110°), criação de diferentes geometrias com a reflexão da luz emitida.

Wall-mounted luminaire with double emission of light and possibility of adjustment of the opening angles (0°-110°), creation of different geometries with the reflection of the light emitted.

Aplique de pared con doble emisión de Luz y posibilidad de regulación de los ángulos de apertura (0°-110°), creación de diferentes geometrías con la reflexión de la luz emitida.

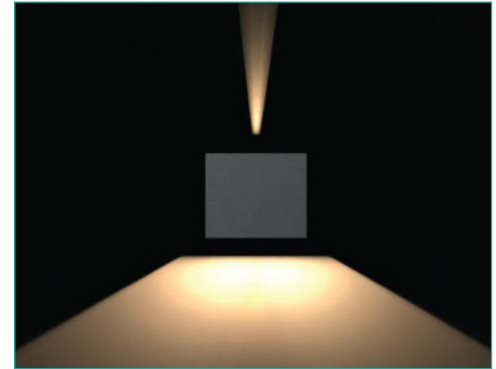


### ILAR-00769


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00769	Length	120mm	Total Luminous Flux	750lm
Led Type	SMD	Width	96.8mm	Luminous Efficacy	75lm/w
Mounting Type	Wall Mount	Height	100mm	Beam Angle	Adjustable 15°~120°
Body Material	Aluminium	Weight	0.59	Colour Temperature	2700K
Housing Colour	White RAL9016	Cutout	-	Colour Rendering Index	>80
Body Shape	-	Packaging Unit	18	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	13.58kg	UGR	-
Dimmable	NO	Volume	120x96.8x100cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Proteccion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

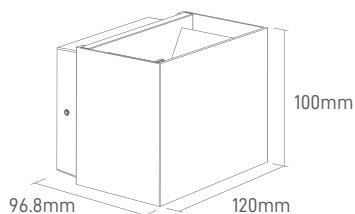

### BEAM ANGLE



## TECHNICAL INFORMATIONS


# LYRA

## 10W 4000K PRETO

Aplique de parede com dupla emissão de Luz e possibilidade de regulação dos ângulos de abertura (0°-110°), criação de diferentes geometrias com a reflexão da luz emitida.

Wall-mounted luminaire with double emission of light and possibility of adjustment of the opening angles (0°-110°), creation of different geometries with the reflection of the light emitted.

Aplique de pared con doble emisión de Luz y posibilidad de regulación de los ángulos de apertura (0°-110°), creación de diferentes geometrías con la reflexión de la luz emitida.

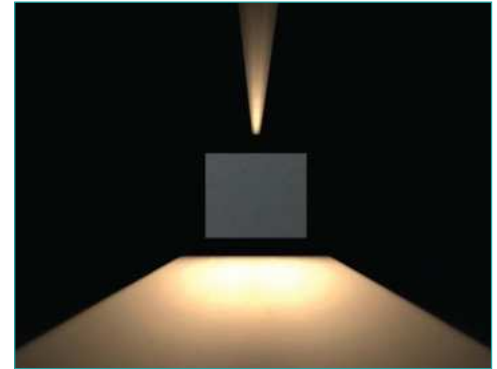


### ILAR-00770


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00770	Lenght	120mm	Total Luminous Flux	900lm
Led Type	SMD	Width	96.8mm	Luminous Efficacy	90lm/w
Mounting Type	Wall mount	Height	100mm	Beam Angle	Adjustable 15°~120°
Body Material	Aluminium	Weight	0.59	Colour Temperature	4000K
Housing Colour	Black RAL9005	Cutout	-	Colour Rendering Index	>80
Body Shape	-	Packaging Unit	18	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	13.58kg	UGR	-
Dimmable	NO	Volume	120x96.8x100cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

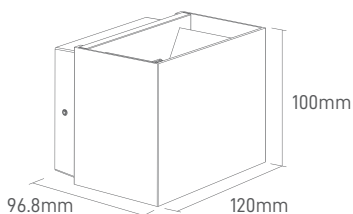

### BEAM ANGLE



## TECHNICAL INFORMATIONS


# LYRA

## 10W 2700K PRETO

Aplique de parede com dupla emissão de Luz e possibilidade de regulação dos ângulos de abertura (0°-110°), criação de diferentes geometrias com a reflexão da luz emitida.

Wall-mounted luminaire with double emission of light and possibility of adjustment of the opening angles (0°-110°), creation of different geometries with the reflection of the light emitted.

Aplique de pared con doble emisión de Luz y posibilidad de regulación de los ángulos de apertura (0°-110°), creación de diferentes geometrías con la reflexión de la luz emitida.

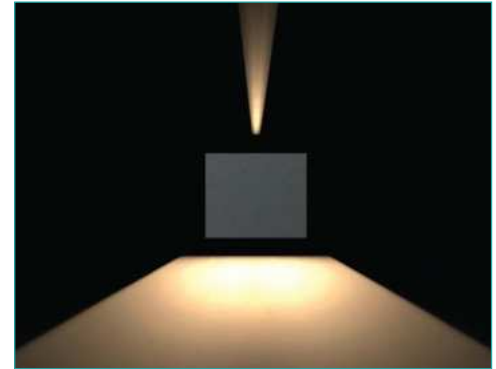


### ILAR-00860


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00860	Length	120mm	Total Luminous Flux	750lm
Led Type	SMD	Width	96.8mm	Luminous Efficacy	75lm/w
Mounting Type	Wall mount	Height	100mm	Beam Angle	Adjustable 15°~120°
Body Material	Aluminium	Weight	0.59	Colour Temperature	2700K
Housing Colour	Black RAL9005	Cutout	-	Colour Rendering Index	>80
Body Shape	-	Packaging Unit	18	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	13.58kg	UGR	-
Dimmable	NO	Volume	120x96.8x100cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Proteccion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

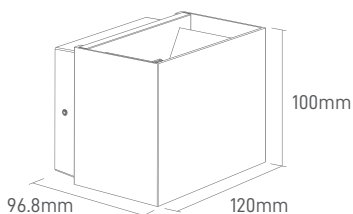

### BEAM ANGLE



## TECHNICAL INFORMATIONS


# LYRA

## 10W 4000K BRANCO

Aplique de parede com dupla emissão de Luz e possibilidade de regulação dos ângulos de abertura (0°-110°), criação de diferentes geometrias com a reflexão da luz emitida.

Wall-mounted luminaire with double emission of light and possibility of adjustment of the opening angles (0°-110°), creation of different geometries with the reflection of the light emitted.

Aplique de pared con doble emisión de Luz y posibilidad de regulación de los ángulos de apertura (0°-110°), creación de diferentes geometrías con la reflexión de la luz emitida.

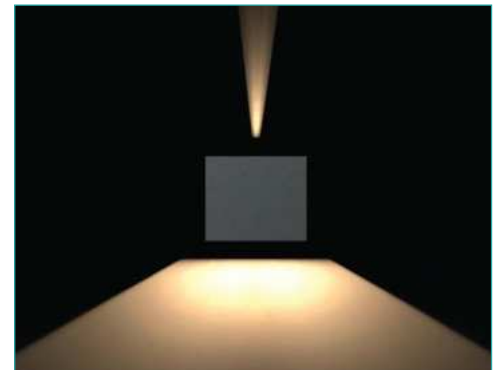


### ILAR-00861

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00861	Length	120mm	Total Luminous Flux	900lm
Led Type	SMD	Width	96.8mm	Luminous Efficacy	90lm/w
Mounting Type	Wall Mount	Height	100mm	Beam Angle	Adjustable 15°~120°
Body Material	Aluminium	Weight	0.59	Colour Temperature	4000K
Housing Colour	White RAL9016	Cutout	-	Colour Rendering Index	>80
Body Shape	-	Packaging Unit	18	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	13.58kg	UGR	-
Dimmable	NO	Volume	120x96.8x100cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Proteccion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

### SIZE

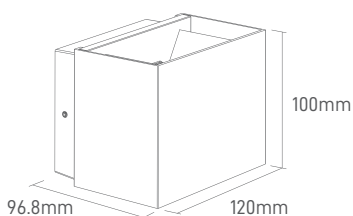

### BEAM ANGLE

