

TECHNICAL INFORMATIONS


QUANT

30W 2700K PRETO

A rotação de 340°, o difusor inovador de foco central de 36° aliados ao Led CREE de alta eficiência (100LM/W) fazem da linha Quant a escolha ideal para qualquer solução comercial.

The 340° rotation, the innovative 36° central focus diffuser coupled with the high efficiency CREE LED (100LM/W) make the Quant line the ideal choice for any commercial solution.

La rotación de 340°, el innovador difusor de foco central de 36° junto con el Led CREE de alta eficiencia (100LM/W) hacen de la línea Quant la opción ideal para cualquier solución comercial.

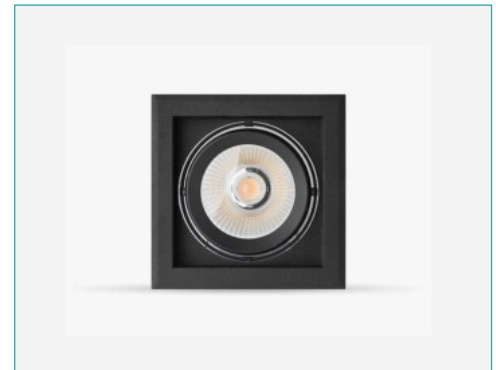


ILAR-00665


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00665	Lenght	175mm	Total Luminous Flux	3000lm
Led Type	CREE COB	Width	175mm	Luminous Efficacy	100lm/w
Mounting Type	Recessed	Height	110mm	Beam Angle	36°
Body Material	Aluminium	Weight	1.25	Colour Temperature	2700K
Housing Colour	Black RAL9005	Cutout	160x160mm	Colour Rendering Index	>80
Body Shape	Square	Packaging Unit	12pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	15.8kg	UGR	-
Dimmable	NO	Volume	43.5x43.5x43cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	30W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP20	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

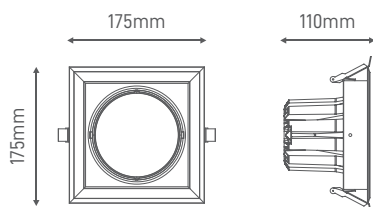

BEAM ANGLE



TECHNICAL INFORMATIONS

QUANT

30W 5000K BRANCO

A rotação de 340°, o difusor inovador de foco central de 36° aliados ao Led CREE de alta eficiência (100LM/W) fazem da linha Quant a escolha ideal para qualquer solução comercial.

The 340° rotation, the innovative 36° central focus diffuser coupled with the high efficiency CREE LED (100LM/W) make the Quant line the ideal choice for any commercial solution.

La rotación de 340°, el innovador difusor de foco central de 36° junto con el Led CREE de alta eficiencia (100LM/W) hacen de la línea Quant la opción ideal para cualquier solución comercial.




ILAR-00676

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00676	Lenght	175mm	Total Luminous Flux	3000lm
Led Type	CREE COB	Width	175mm	Luminous Efficacy	100lm/w
Mounting Type	Recessed	Height	110mm	Beam Angle	36°
Body Material	Aluminium	Weight	1.25	Colour Temperature	5000K
Housing Colour	White RAL9016	Cutout	160x160mm	Colour Rendering Index	>80
Body Shape	Square	Packaging Unit	12pcs/carton	Colour Consistency	<=6
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	15.8kg	UGR	-
Dimmable	NO	Volume	43.5x43.5x43cm		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	30W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	200-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP20	ROHS	YES
Power Factor	≥0.9	Protection Class	I	ENEC	-
Operating Temperature	-20°C to +45°C	Protecion Class IK (shock resistance)	-	Warranty	3 YEARS
Starting Time 100% ON	0.0001s				
ON/OFF Cycles	100.000				

SIZE

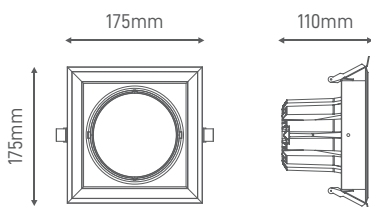

BEAM ANGLE

