

TECHNICAL INFORMATION

HIGH LUMEN IP20

22W 3000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index , ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.




ILAR-01704

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01704	Length	5000mm	Total Luminous Flux	2657lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	3000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

HIGH LUMEN IP20

22W 4000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index , ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.




ILAR-01705

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01705	Length	5000mm	Total Luminous Flux	2830lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

HIGH LUMEN IP20

22W 6000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.




ILAR-01706

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01706	Length	5000mm	Total Luminous Flux	2851lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	6000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP20	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION


HIGH LUMEN IP67

22W 3000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

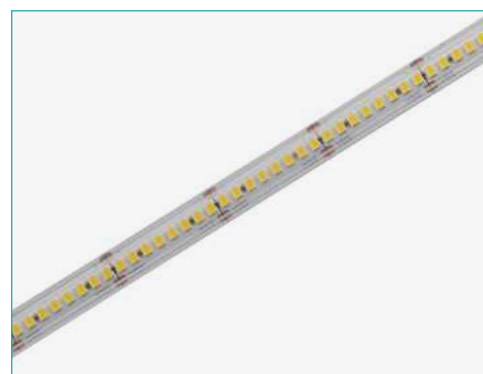


ILAR-01707

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01707	Length	5000mm	Total Luminous Flux	2657lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	3000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION


HIGH LUMEN IP67

22W 4000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index, ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

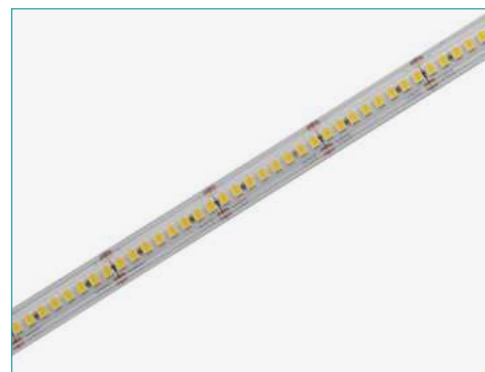


ILAR-01708

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01708	Length	5000mm	Total Luminous Flux	2830lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	4000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION


HIGH LUMEN IP67

22W 6000K

Linha de Fitas LED de 24V com um índice de reprodução cromática elevada, ideal para locais de exposição onde a qualidade de cor é um requisito determinante.

24V LED Strip line with a high color rendering index , ideal for exhibition venues where color quality is a determining requirement.

Línea de tira de LED de 24V con un índice de reproducción cromática elevado, ideal para lugares de exposición donde la calidad del color es un requisito determinante.

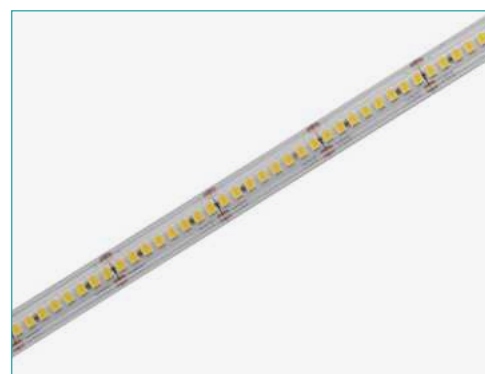


ILAR-01709

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01709	Length	5000mm	Total Luminous Flux	2851lm/M
Type	LED ProStrip	Width	10mm	Luminous Efficacy	118~152lm/w
Type LED	SMD 2835	Tape	3M VHB	LED/MT	240LEDs/W
Nominal Lifetime (EOL end of life)	30000h	Cutting Segment	33.33mm	Beam Angle	120°
				Colour Temperature	6000K
				Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Power Rated	22W	Energy Label	A+	CE	YES
Equivalent Wattage	-	Type of Protection	IP67	ROHS	YES
Lamp Current	-			WARRANTY	2 YEARS
Voltage	24V				
Nominal Voltage	-				
Operating Frequency	-				
Power Factor	-				
Starting Time	-				
Warm - Up Time (60%)	-				
Operating Temperature	-20°C to +40°C				

SIZE



Designed by Aronlight in Portugal. Made in PRC

