

TECHNICAL INFORMATIONS

FLEXI II

7W 3CCT WHITE

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5700K), design elegante. Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5700K), stylish design. Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5700K), diseño elegante. Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




ILAR-02243

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02243	Dimensions	Ø110x25mm	Total Luminous Flux	840lm
Led Chip	Epistar2835	Cut-out	Ø75-95mm	Luminous Efficacy	120lm/w
Mounting Type	Recessed	Packaging Unit	50pcs/carton	Beam Angle	100°
Body Material	PC+Aluminum			Colour Temperature	3CCT (3000K-4000K-5700K)
Housing Colour	White RAL9016			Colour Rendering Index	>80
Nominal Lifetime (EOL end of life)	50.000H			UGR	<19
Dimmable	Yes (Optional)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	7W	Type of Protection	IP54	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	Warranty	3 YEARS
Operating Frequency	50/60Hz	Protecion Class IK (shock resistance)	IK05		
Power Factor	≥0.5				
Operating Temperature	-20°C to +45°C				

SIZE



ACCESSORIES



ILAR-02346
Surface KIT

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FLEXI II

12W 3CCT WHITE

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5700K), design elegante. Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5700K), stylish design. Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5700K), diseño elegante. Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




ILAR-02244

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02244	Dimensions	Ø145x30mm	Total Luminous Flux	1620lm
Led Chip	Epistar2835	Cut-out	Ø120-135mm	Luminous Efficacy	120lm/w
Mounting Type	Recessed	Packaging Unit	50pcs/carton	Beam Angle	100°
Body Material	PC+Aluminum			Colour Temperature	3CCT (3000K-4000K-5700K)
Housing Colour	White RAL9016			Colour Rendering Index	>80
Nominal Lifetime (EOL end of life)	50.000H			UGR	<19
Dimmable	Yes (Optional)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	12W	Type of Protection	IP54	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	Warranty	3 YEARS
Operating Frequency	50/60Hz	Protecion Class IK (shock resistance)	IK05		
Power Factor	≥0.5				
Operating Temperature	-20°C to +45°C				

SIZE



ACCESSORIES



ILAR-02347
Surface KIT

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

FLEXI II

18W 3CCT WHITE

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5700K), design elegante. Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5700K), stylish design. Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5700K), diseño elegante. Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




ILAR-02245

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02245	Dimensions	Ø195x39mm	Total Luminous Flux	2520lm
Led Chip	Epistar2835	Cut-out	Ø165-185mm	Luminous Efficacy	120lm/w
Mounting Type	Recessed	Packaging Unit	50pcs/carton	Beam Angle	100°
Body Material	PC+Aluminum			Colour Temperature	3CCT (3000K-4000K-5700K)
Housing Colour	White RAL9016			Colour Rendering Index	>80
Nominal Lifetime (EOL end of life)	50.000H			UGR	<19
Dimmable	Yes (Optional)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	18W	Type of Protection	IP54	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	Warranty	3 YEARS
Operating Frequency	50/60Hz	Protecion Class IK (shock resistance)	IK05		
Power Factor	≥0.5				
Operating Temperature	-20°C to +45°C				

SIZE



ACCESSORIES



ILAR-02348
Surface KIT

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS


FLEXI II

24W 3CCT WHITE

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5700K), design elegante. Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5700K), stylish design. Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5700K), diseño elegante. Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.

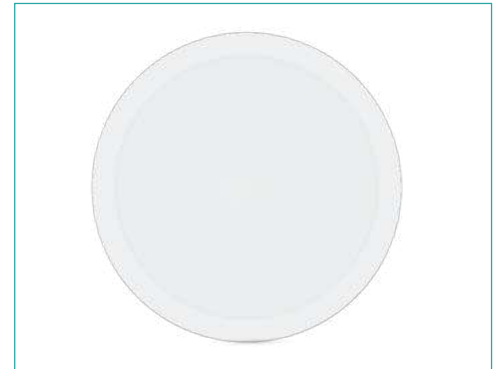


ILAR-02246

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02246	Dimensions	Ø230x39mm	Total Luminous Flux	3360lm
Led Chip	Epistar2835	Cut-out	Ø205-220mm	Luminous Efficacy	120lm/w
Mounting Type	Recessed	Packaging Unit	50pcs/carton	Beam Angle	100°
Body Material	PC+Aluminum			Colour Temperature	3CCT (3000K-4000K-5700K)
Housing Colour	White RAL9016			Colour Rendering Index	>80
Nominal Lifetime (EOL end of life)	50.000H			UGR	<19
Dimmable	Yes (Optional)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	24W	Type of Protection	IP54	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	Warranty	3 YEARS
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK05		
Power Factor	≥0.5				
Operating Temperature	-20°C to +45°C				

SIZE

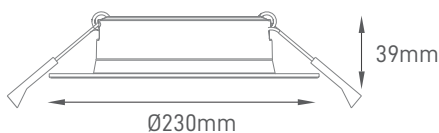

Designed by Aronlight in Portugal. Made in PRC

