



## TECHNICAL INFORMATION

### UNA II CCT 10W BRANCO

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5000K), design elegante, lente opal para um desempenho superior e alta proteção (IP65/IP44). Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5000K), stylish design, opal lens for superior performance and high protection (IP65/IP44). Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5000K), diseño elegante, lente opal para un rendimiento superior y alta protección (IP65/IP44). Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.



#### ILAR-01570

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01570	Lenght	Ø110mm	Total Luminous Flux	900lm
LED Brand	Smalite	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Recessed	Height	45mm	Beam Angle	120°
Body Material	PC+Aluminium	Weight	350gr	Colour Temperature	3000K-4000K-5000K
Housing Colour	White RAL9016	Cutout	Ø95mm	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	36pcs/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<23
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	10W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65/IP44	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK03		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	>15.000				

SIZE	BEAM ANGLE

Designed by Aron Light in Portugal. Made in PRC





## TECHNICAL INFORMATION

### UNA II CCT 15W BRANCO

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5000K), design elegante, lente opal para um desempenho superior e alta proteção (IP65/IP44). Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5000K), stylish design, opal lens for superior performance and high protection (IP65/IP44). Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5000K), diseño elegante, lente opal para un rendimiento superior y alta protección (IP65/IP44). Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




#### ILAR-01571


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01571	Lenght	Ø140mm	Total Luminous Flux	1350lm
LED Brand	Smalite	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Recessed	Height	45mm	Beam Angle	120°
Body Material	PC+Aluminium	Weight	430gr	Colour Temperature	3000K-4000K-5000K
Housing Colour	White RAL9016	Cutout	Ø125mm	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	24pcs/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<23
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	15W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65/IP44	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK03		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	>15.000				

#### SIZE

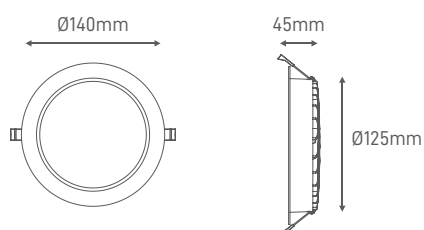

#### BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC



## TECHNICAL INFORMATION

### UNA II CCT 18W BRANCO

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5000K), design elegante, lente opal para um desempenho superior e alta proteção (IP65/IP44). Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5000K), stylish design, opal lens for superior performance and high protection (IP65/IP44). Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5000K), diseño elegante, lente opal para un rendimiento superior y alta protección (IP65/IP44). Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




#### ILAR-01572


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01572	Lenght	Ø190mm	Total Luminous Flux	1620lm
LED Brand	Smalite	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Recessed	Height	45mm	Beam Angle	120°
Body Material	PC+Aluminium	Weight	640gr	Colour Temperature	3000K-4000K-5000K
Housing Colour	White RAL9016	Cutout	Ø170mm	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	16pcs/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<23
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	18W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65/IP44	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK03		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	>15.000				

#### SIZE

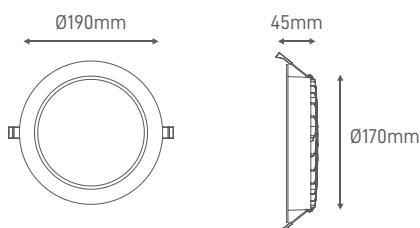

#### BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC





## TECHNICAL INFORMATIONS

### UNA II CCT 25W BRANCO

Downlight que permite a mudança da temperatura de luz (3000K-4000K-5000K), design elegante, lente opal para um desempenho superior e alta proteção (IP65/IP44). Ideal para locais onde seja necessária a flexibilidade de adaptação de ambiente/cor.

Versatile Downlight with color temperature change possibility (3000K-4000K-5000K), stylish design, opal lens for superior performance and high protection (IP65/IP44). Ideal for locations where flexibility of adapting environment/color is required.

Downlight con posibilidad de cambio de temperatura de la luz (3000K-4000K-5000K), diseño elegante, lente opal para un rendimiento superior y alta protección (IP65/IP44). Ideal para lugares donde se requiere flexibilidad para adaptar el ambiente/color.




#### ILAR-01573


REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01573	Lenght	Ø228mm	Total Luminous Flux	2250lm
LED Brand	Smalite	Width	-	Luminous Efficacy	90lm/w
Mounting Type	Recessed	Height	45mm	Beam Angle	120°
Body Material	PC+Aluminium	Weight	890gr	Colour Temperature	3000K-4000K-5000K
Housing Colour	White RAL9016	Cutout	Ø205mm	Colour Rendering Index	>80
Body Shape	Round	Packaging Unit	10pcs/carton	Colour Consistency	-
Nominal Lifetime (EOL end of life)	50.000H	Gross Weight	-	UGR	<23
Dimming Options	1-10V / DALI				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	25W	Energy Label	-	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50Hz	Type of Protection	IP65/IP44	ROHS	YES
Power Factor	≥0.5	Protection Class	Class II	Warranty	3 YEARS
Operating Temperature	-20°C to +45°C	Protection Class IK (shock resistance)	IK03		
Starting Time 100% ON	0.5s				
ON/OFF Cycles	>15.000				

#### SIZE

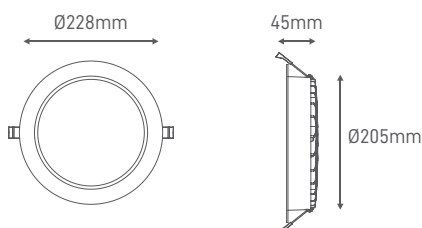

#### BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

