

## TECHNICAL INFORMATIONS

# LINEAR MODULAR LIGHT

## 20W 3CCT

Modular aluminum luminaire with an elegant design.  
Luminária modular de alumínio com design elegante.  
Luminaria modular de aluminio con un diseño elegante.



### ILAR-02111

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02111	Lenght	600mm	Total Luminous Flux	2400lm
Mounting Type	Surface/Suspended	Width	54mm	Luminous Efficacy	120lm/w
Body Material	PC+Aluminum	Height	58mm	Beam Angle	120°
Housing Colour	Black	Packaging Unit	1pc/carton	Colour Temperature	3CCT (3000K-4000K-6000K)
Body Shape	Rectangular	Weight (g)	510grs	Colour Rendering Index	>80
Lifetime (L70B50) at Ta=25°C)	30000H			SDCM	<6

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	20W	Type of Protection	IP20	2014/30/EU (EMC Directive)	YES
Nominal Voltage	170-265V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protecion Class IK (shock resistance)	IK09	ROHS	YES
Power Factor	≥0.9			Warranty	3 YEARS
Operating Temperature	-20°C to +45°C				
Starting Time 100% ON	0.5s				
Switching Times	10000				
Group Connection	MAX. 1000W				

SIZE	RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)					
	<p>X Conector ILAR-02115</p>	<p>T Conector ILAR-02114</p>	<p>L Conector ILAR-02113</p>	<p>Power Cable 0.3M ILAR-01813</p>	<p>Power Cable 1.5M ILAR-01814</p>	<p>Connect Cable 2M ILAR-01815</p>
	<p>Kit Suspensão ILAR-01810</p>	<p>Kit Encastrar ILAR-01811</p>	<p>Kit Superfície ILAR-01812</p>			

Designed by Aronlight in Portugal. Made in PRC



## TECHNICAL INFORMATIONS

# LINEAR MODULAR LIGHT

## 40W 3CCT

Modular aluminum luminaire with an elegant design.  
Luminária modular de alumínio com design elegante.  
Luminaria modular de aluminio con un diseño elegante.



### ILAR-02112

#### REFERENCE

Reference	ILAR-02112
Mounting Type	Surface/Suspended
Body Material	PC+Aluminum
Housing Colour	Black
Body Shape	Rectangular
Lifetime (L70B50) at Ta=25°C)	30000H

#### DIMENSION & WEIGHT

Lenght	1200mm
Width	54mm
Height	58mm
Packaging Unit	1pc/carton
Weight (g)	1100grs

#### PHOTOMETRICAL DATA

Total Luminous Flux	4800lm
Luminous Efficacy	120lm/w
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>80
SDCM	<6

#### ELECTRICAL AND OPERATING DATA

Nominal Wattage	40W
Nominal Voltage	170-265V
Operating Frequency	50/60Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.5s
Switching Times	10000
Group Connection	MAX. 1000W


#### ENERGY LABEL & STANDARS

Type of Protection	IP20
Protection Class	Class II
Protection Class IK (shock resistance)	IK09


#### CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

#### SIZE

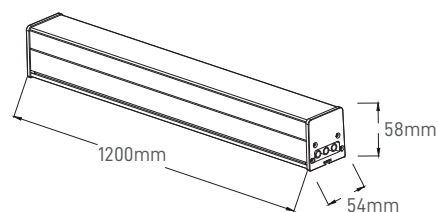

#### RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)

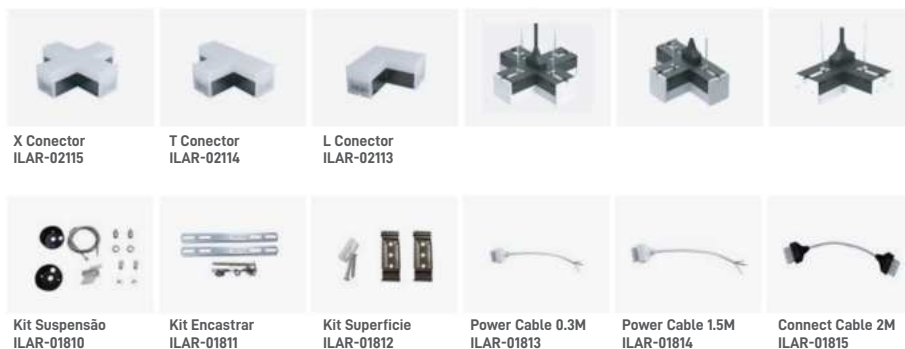

Designed by Aronlight in Portugal. Made in PRC

