

TECHNICAL INFORMATIONS

LYNX EVO

45W 3CCT

Modular aluminum luminaire with an elegant design.
Luminária modular de alumínio com design elegante.
Luminaria modular de aluminio con un diseño elegante.




ILAR-02247

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02247	Lenght	1500mm	Total Luminous Flux	5625lm
Mounting Type	Pendant/Surface/Trimless	Width	55mm	Luminous Efficacy	125lm/w
Body Material	Aluminum	Height	75mm	Beam Angle	120°
Housing Colour	White RAL9016	Cut-out	-	Colour Temperature	3CCT 3000K-4000K-5700K
Body Shape	Rectangular	Packaging Unit	4pcs/carton	Colour Rendering Index	>80
Lifetime	60000H				
Dimmable	Optional (TRIAC/DALI/1-10V)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	45W	Type of Protection	IP20	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK03	ROHS	YES
Power Factor	≥0.9			Warranty	3 YEARS
Operating Temperature	-20°C to +45°C				
Starting Time 100% ON	0.5s				
Group Connection	MAX. 1000W				

SIZE

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)

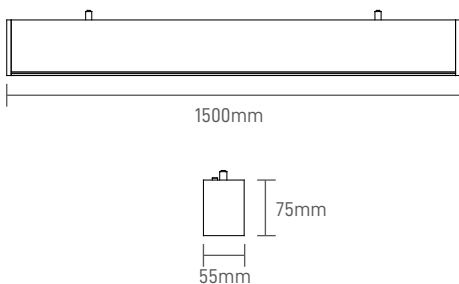

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATIONS

LYNX EVO

36W 3CCT

Modular aluminum luminaire with an elegant design.
Luminária modular de alumínio com design elegante.
Luminaria modular de aluminio con un diseño elegante.



ILAR-02249

REFERENCE

Reference	ILAR-02249
Mounting Type	Pendant/Surface/Trimless
Body Material	Aluminum
Housing Colour	White RAL9016
Body Shape	Rectangular
Lifetime	60000H
Dimmable	Optional (TRIAC/DALI/1-10V)

DIMENSION & WEIGHT

Lenght	1200mm
Width	55mm
Height	75mm
Cut-out	-
Packaging Unit	4pcs/carton

PHOTOMETRICAL DATA

Total Luminous Flux	4500lm
Luminous Efficacy	125lm/w
Beam Angle	120°
Colour Temperature	3CCT 3000K-4000K-5700K
Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA

Nominal Wattage	36W
Nominal Voltage	220-240V
Operating Frequency	50/60Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.5s
Group Connection	MAX. 1000W


ENERGY LABEL & STANDARS

Type of Protection	IP20
Protection Class	Class II
Protection Class IK (shock resistance)	IK03

CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

SIZE

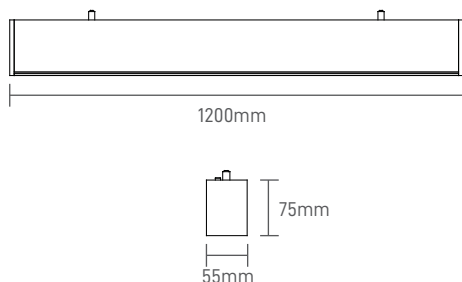

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)



Designed by Aronlight in Portugal. Made in PRC




TECHNICAL INFORMATIONS

LYNX EVO

18W 3CCT

Modular aluminum luminaire with an elegant design.
 Luminária modular de alumínio com design elegante.
 Luminaria modular de aluminio con un diseño elegante.

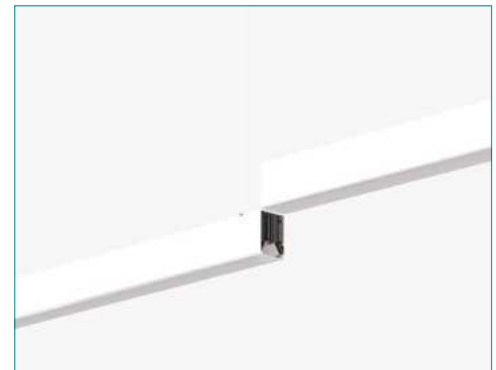


ILAR-02251

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02251	Dimensions	600x55x75mm	Total Luminous Flux	2250lm
Mounting Type	Pendant/Surface/Trimless	Packaging Unit	4pcs/carton	Luminous Efficacy	125lm/w
Body Material	Aluminum			Beam Angle	120°
Housing Colour	White RAL9016			Colour Temperature	3CCT 3000K-4000K-5700K
Body Shape	Rectangular			Colour Rendering Index	>80
Lifetime	60000H				
Dimmable	Optional (TRIAC/DALI/1-10V)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	18W	Type of Protection	IP20	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK03	ROHS	YES
Power Factor	≥0.9			Warranty	3 YEARS
Operating Temperature	-20°C to +45°C				
Starting Time 100% ON	0.5s				
Group Connection	MAX. 1000W				

SIZE

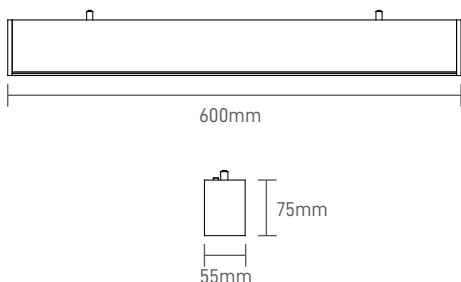

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)



Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATIONS

LYNX EVO

45W 3CCT

Modular aluminum luminaire with an elegant design.
 Luminária modular de alumínio com design elegante.
 Luminaria modular de aluminio con un diseño elegante.




ILAR-02248

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02248	Lenght	1500mm	Total Luminous Flux	5625lm
Mounting Type	Pendant/Surface/Trimless	Width	55mm	Luminous Efficacy	125lm/w
Body Material	Aluminum	Height	75mm	Beam Angle	120°
Housing Colour	Black RAL 9005	Cut-out	-	Colour Temperature	3CCT 3000K-4000K-5700K
Body Shape	Rectangular	Packaging Unit	4pcs/carton	Colour Rendering Index	>80
Lifetime	60000H				
Dimmable	Optional (TRIAC/DALI/1-10V)				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	45W	Type of Protection	IP20	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Protection Class	Class II	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK03	ROHS	YES
Power Factor	≥0.9			Warranty	3 YEARS
Operating Temperature	-20°C to +45°C				
Starting Time 100% ON	0.5s				
Group Connection	MAX. 1000W				

SIZE

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)

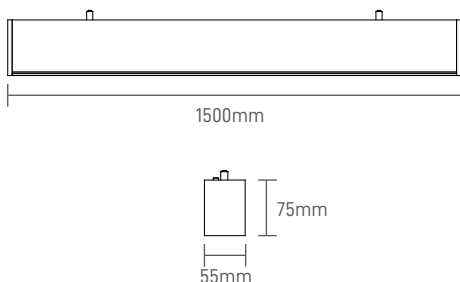

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATIONS

LYNX EVO

36W 3CCT

Modular aluminum luminaire with an elegant design.
Luminária modular de alumínio com design elegante.
Luminaria modular de aluminio con un diseño elegante.



ILAR-02250

REFERENCE

Reference	ILAR-02250
Mounting Type	Pendant/Surface/Trimless
Body Material	Aluminum
Housing Colour	Black RAL 9005
Body Shape	Rectangular
Lifetime	60000H
Dimmable	Optional (TRIAC/DALI/1-10V)

DIMENSION & WEIGHT

Lenght	1200mm
Width	55mm
Height	75mm
Cut-out	-
Packaging Unit	4pcs/carton

PHOTOMETRICAL DATA

Total Luminous Flux	4500lm
Luminous Efficacy	125lm/w
Beam Angle	120°
Colour Temperature	3CCT 3000K-4000K-5700K
Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA

Nominal Wattage	36W
Nominal Voltage	220-240V
Operating Frequency	50/60Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.5s
Group Connection	MAX. 1000W


ENERGY LABEL & STANDARS

Type of Protection	IP20
Protection Class	Class II
Protection Class IK (shock resistance)	IK03

CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

SIZE

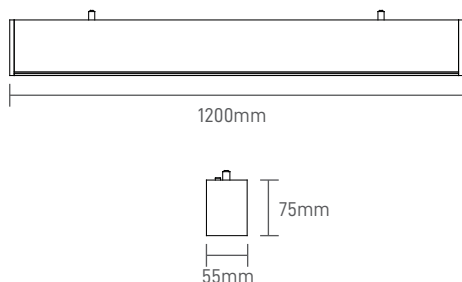

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)



Designed by Aronlight in Portugal. Made in PRC




TECHNICAL INFORMATIONS

LYNX EVO

18W 3CCT

Modular aluminum luminaire with an elegant design.
 Luminária modular de alumínio com design elegante.
 Luminaria modular de aluminio con un diseño elegante.

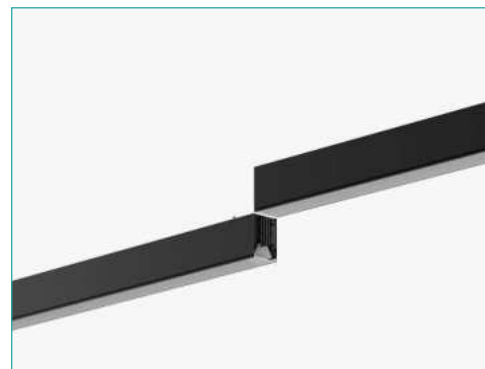

ILAR-02252

REFERENCE

Reference	ILAR-02252
Mounting Type	Pendant/Surface/Trimless
Body Material	Aluminum
Housing Colour	Black RAL 9005
Body Shape	Rectangular
Lifetime	60000H
Dimmable	Optional (TRIAC/DALI/1-10V)

DIMENSION & WEIGHT

Dimensions	600x55x75mm
Packaging Unit	4pcs/carton

PHOTOMETRICAL DATA

Total Luminous Flux	2250lm
Luminous Efficacy	125lm/w
Beam Angle	120°
Colour Temperature	3CCT 3000K-4000K-5700K
Colour Rendering Index	>80

ELECTRICAL AND OPERATING DATA

Nominal Wattage	18W
Nominal Voltage	220-240V
Operating Frequency	50/60Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.5s
Group Connection	MAX. 1000W


ENERGY LABEL & STANDARS

Type of Protection	IP20
Protection Class	Class II
Protection Class IK (shock resistance)	IK03

CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

SIZE

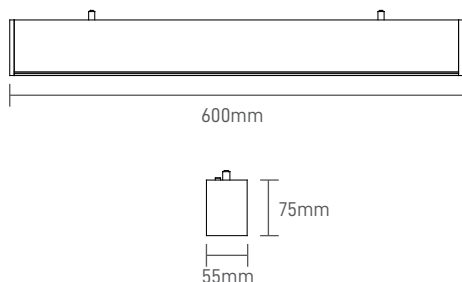

RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)



Designed by Aronlight in Portugal. Made in PRC

