

TECHNICAL INFORMATIONS

PISCINA IP68

10W 2700K

ILAR-02329



GENERAL DATA

Type	LED ProStrip
Type LED	SMD 2216
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 Years
Max Depth of Water	2 Meters

DIMENSION & WEIGHT

Length	5000mm
Width	15x10.5mm
Tape	3M
Cutting Segment	100mm

PHOTOMETRICAL DATA

Luminous Efficacy	770lm/m
LED/MT	240led/m
Beam Angle	120°
Colour Temperature	2700K
Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-10°C to 45°C


ENERGY LABEL & STANDARS

Type of Protection	IP68
--------------------	------

CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

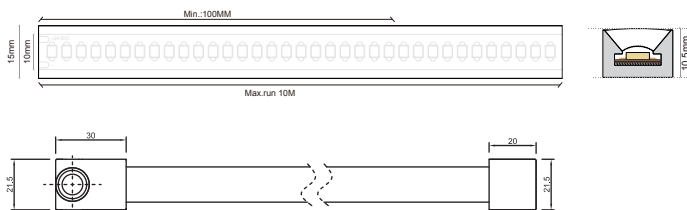

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

PISCINA IP68

10W 4000K

ILAR-02330



GENERAL DATA

Type	LED ProStrip
Type LED	SMD 2216
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 Years
Max Depth of Water	2 Meters

DIMENSION & WEIGHT

Length	5000mm
Width	15x10.5mm
Tape	3M
Cutting Segment	100mm

PHOTOMETRICAL DATA

Luminous Efficacy	880lm/m
LED/MT	240led/m
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-10°C to 45°C


ENERGY LABEL & STANDARS

Type of Protection	IP68
--------------------	------

CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

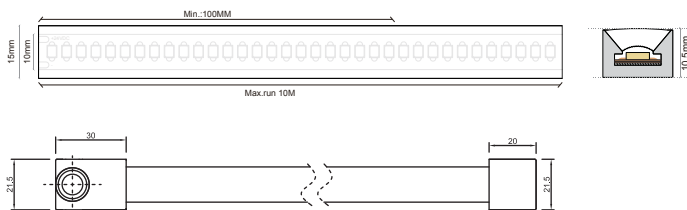

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

PISCINA IP68

10W 2700K

ILAR-02331



GENERAL DATA

Type	LED ProStrip
Type LED	SMD 2216
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 Years
Max Depth of Water	2 Meters

DIMENSION & WEIGHT

Length	10000mm
Width	15x10.5mm
Tape	3M
Cutting Segment	100mm

PHOTOMETRICAL DATA

Luminous Efficacy	770lm/m
LED/MT	240led/m
Beam Angle	120°
Colour Temperature	2700K
Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-10°C to 45°C


ENERGY LABEL & STANDARS

Type of Protection	IP68
--------------------	------

CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

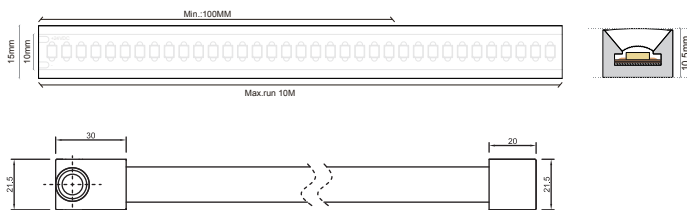

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

PISCINA IP68

10W 4000K

ILAR-02332



GENERAL DATA

Type	LED ProStrip
Type LED	SMD 2216
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 Years
Max Depth of Water	2 Meters

DIMENSION & WEIGHT

Length	10000mm
Width	15x10.5mm
Tape	3M
Cutting Segment	100mm

PHOTOMETRICAL DATA

Luminous Efficacy	880lm/m
LED/MT	240led/m
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>90

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-10°C to 45°C


ENERGY LABEL & STANDARS

Type of Protection	IP68
--------------------	------

CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

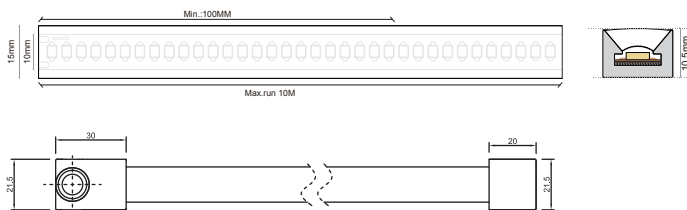

Designed by Aronlight in Portugal. Made in PRC

