



TECHNICAL INFORMATIONS

SAUNA IP67

10W 2700K

ILAR-02326



GENERAL DATA

Type	LED ProStrip
Type LED	COB
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 YEARS

DIMENSION & WEIGHT

Length	5000mm
Width	10mm
Tape	3M
Cutting Segment	50mm

PHOTOMETRICAL DATA

Luminous Efficacy	840lm/m
LED/MT	480led/m
Beam Angle	120°
Colour Temperature	2700K
Colour Rendering Index	>90
Color Tolerance	SDCM<5

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-20°C to 105°C


ENERGY LABEL & STANDARDS

Type of Protection	IP67
--------------------	------


CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

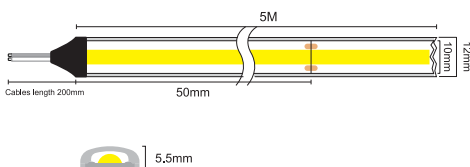

SIZE

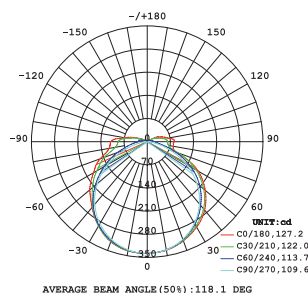

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

SAUNA IP67

10W 4000K

ILAR-02327



GENERAL DATA

Type	LED ProStrip
Type LED	COB
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 YEARS

DIMENSION & WEIGHT

Length	5000mm
Width	10mm
Tape	3M
Cutting Segment	50mm

PHOTOMETRICAL DATA

Luminous Efficacy	980lm/m
LED/MT	480led/m
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>90
Color Tolerance	SDCM<5

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-20°C to 105°C


ENERGY LABEL & STANDARDS

Type of Protection	IP67
--------------------	------


CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

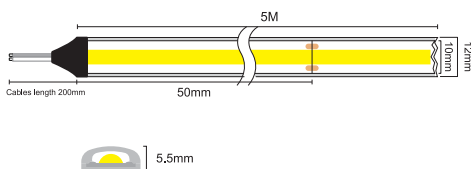

SIZE

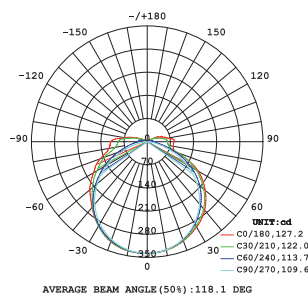

Designed by Aronlight in Portugal. Made in PRC





TECHNICAL INFORMATIONS

SAUNA IP67

10W 6500K

ILAR-02328



GENERAL DATA

Type	LED ProStrip
Type LED	COB
Nominal Lifetime (EOL end of life)	30000H
Warranty	3 YEARS

DIMENSION & WEIGHT

Length	5000mm
Width	10mm
Tape	3M
Cutting Segment	50mm

PHOTOMETRICAL DATA

Luminous Efficacy	970lm/m
LED/MT	480led/m
Beam Angle	120°
Colour Temperature	6500K
Colour Rendering Index	>90
Color Tolerance	SDCM<5

ELECTRICAL AND OPERATING DATA

Power Rated	10W/m
Equivalent Wattage	-
Lamp Current	-
Voltage	24V
Nominal Voltage	-
Operating Frequency	-
Starting Time	-
Warm - Up Time (60%)	-
Operating Temperature	-20°C to 105°C


ENERGY LABEL & STANDARDS

Type of Protection	IP67
--------------------	------


CERTIFICATIONS

CE	YES
ROHS	YES

SIZE

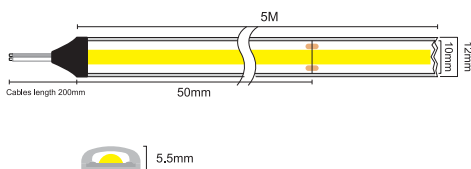

SIZE



Designed by Aronlight in Portugal. Made in PRC

