

TECHNICAL INFORMATION

LINEAR WALL WASHER RL2-48

48W RGB+CCT

Luminária de fachada, com RGB+CCT e controlo RF à distância. Apresenta um alto índice de protecção (IK08, IP66).

Facade luminaire, with RGB+CCT and remote RF control. It features a high protection index (IK08, IP66).


Luminaria de fachada, con RGB+CCT y control remoto RF. Cuenta con un alto índice de protección (IK08, IP66).



ILAR-01728

GENERAL DATA		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01728	Dimensions	1017x115x64mm	Total Luminous Flux	3200lm
Mounting Type	Wall/Ceiling	Weight	2,5kg	Luminous Efficacy	65 lm/W
Body Material	Die-Cast Aluminium	Packaging Unit	Carton box 20 pc	Beam Angle	15°x60°
Difuser Material	Tempered glass			Colour Temperature	RGB+CCT(2700K-6500K)
Housing Colour	Grey			Colour Rendering Index	>80
Intelligent control	YES (RF 2.4 GHz-30m)				
Control	MiBoxer Remotes				
Warranty	3 YEARS				
ELECTRICAL AND OPERATING DATA		STANDARS		CERTIFICATIONS	
Nominal Wattage	48W	Energy Label	G	CE	YES
Nominal Voltage	AC100-240V	Energy Consumption KWH/1000H	48kWh		
Operating Frequency	50/60Hz	Type of Protection	IP66		
Operating Temperature	-20° C to + 60° C	Protection Class	Class I		
Power Factor	>0,9	Type of Protection(IK)	IK08		

SIZE

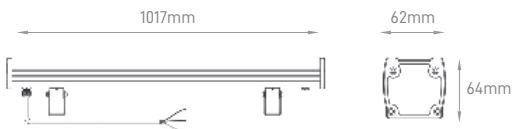

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

LINEAR WALL WASHER RL1-24

24W RGB+CCT

Luminária de fachada, com RGB+CCT e controlo RF à distância. Apresenta um alto índice de protecção (IK08, IP66).

Facade luminaire, with RGB+CCT and remote RF control. It features a high protection index (IK08, IP66).


Luminaria de fachada, con RGB+CCT y control remoto RF. Cuenta con un alto índice de protección (IK08, IP66).



ILAR-01729

GENERAL DATA		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-01729	Dimensions	1017x115x64mm	Total Luminous Flux	1800lm
Mounting Type	Wall/Ceiling	Weight	2,5kg	Luminous Efficacy	75 lm/W
Body Material	Die-Cast Aluminium	Packaging Unit	Carton box 20 pc	Beam Angle	15°x60°
Difuser Material	Tempered glass			Colour Temperature	RGB+CCT(2700K-6500K)
Housing Colour	Grey			Colour Rendering Index	>80
Intelligent control	YES (RF 2.4 GHz-30m)				
Control	MiBoxer Remotes				
Warranty	3 YEARS				
ELECTRICAL AND OPERATING DATA		STANDARS		CERTIFICATIONS	
Nominal Wattage	24W	Energy Label	G	CE	YES
Nominal Voltage	AC100-240V	Energy Consumption KWH/1000H	24kWh		
Operating Frequency	50/60Hz	Type of Protection	IP66		
Operating Temperature	-20° C to + 60° C	Protection Class	Class I		
Power Factor	>0,9	Type of Protection(IK)	IK08		

SIZE

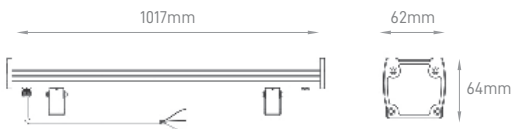

Designed by Aronlight in Portugal. Made in PRC

