

## TECHNICAL INFORMATIONS


# SAFELUX DOUBLE 4.5W

## MAINTAINED / NON MAINTAINED

Armadura de emergência de linhas direitas equipada para uso de telecomando e pode ser convertida em bandeirola. Está equipada com proteção IP65 e bateria com duração de 3 horas.

Straight Desing emergency batten equipped to use with remote control and can be converted into a Edge-lit exit. It is equipped with IP65 protection and a battery lasting 3 hours.

Luminaria de emergencia equipada para uso con control remoto y convertible placa de señalización. Está equipado con protección IP65 y una batería de 3 horas de duración.

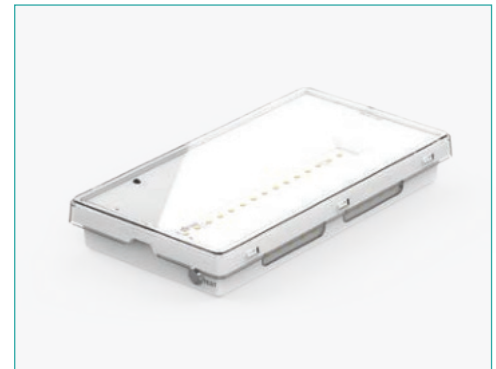

### ILEM-00071

REFERENCE	
POWER	4.5W
CCT	6000K
LUMINOUS FLUX IN AC MODE	100lm + 50lm for panic downlight
LUMINOUS FLUX IN EM MODE	150lm + 75lm for panic downlight
BATTERIES	3.2V 1800mAh LiFePO4
LIFE TIME BATTERIES	2000 cycle of charging and discharging
LIFE TIME	50000H
VOLTAGE	220-240/50-60Hz
IP	IP65
OUTPUT VOLTAGE	5V ±0.5V
OUTPUT POWER	3.8W
CHARGING TIME	24H
DISCHARGING TIME	3H
SELF TEST	YES
SIZE)	269x144x39mm
LED TYPE	SMD2835 15+10PCS
PROTECTION CLASS	Class II
PROTECION CLASS IK (SHOCK RESISTENCE)	IK08
MOUNTING TYPE	Surface
BODY MATERIAL	Polycarbonate
COLOR	White
BODY SHAPE	Rectangular
BOX QUANTITY	1 pc / carton
CERTIFICATION	NP EN 60598-2-22
NP	NP EN 6049-2-22

### SIZE

