

TECHNICAL INFORMATION

SKILL

6W 3CCT WHITE W/RECESSED BOX


ILAR-02939



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02939	Lenght	108mm	Total Luminous Flux	380lm
Body Material	PC+ABS housing, PC diffuser	Width	247mm	Luminous Efficacy	65lm/W
Housing Colour	White RAL 9016	Height	88mm	Beam Angle	110°
Lifetime	>30000H			Colour Temperature	3CCT 3000K / 4000K / 6500K
Mounting Type	Recessed			Colour Rendering Index	80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	6W	Type of Protection	IP65	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	ROHS	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK06	Warranty	3 YEARS
Operating Temperature	- 25° C to + 45° C				

SIZE

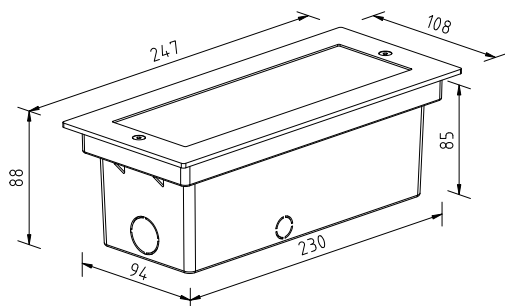

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

SKILL

6W 3CCT BLACK

W/RECESSED BOX


ILAR-02940



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02940	Lenght	108mm	Total Luminous Flux	380lm
Body Material	PC+ABS housing, PC diffuser	Width	247mm	Luminous Efficacy	65lm/W
Housing Colour	Black RAL 9005	Height	88mm	Beam Angle	110°
Lifetime	>30000H			Colour Temperature	3CCT 3000K / 4000K / 6500K
Mounting Type	Recessed			Colour Rendering Index	80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	6W	Type of Protection	IP65	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	ROHS	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK06	Warranty	3 YEARS
Operating Temperature	- 25° C to + 45° C				

SIZE

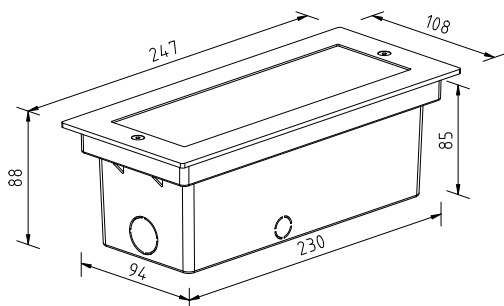

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

SKILL

6W 3CCT STAINLESS STEEL W/RECESSED BOX


ILAR-02941



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02941	Lenght	108mm	Total Luminous Flux	380lm
Body Material	PC+ABS housing, PC diffuser	Width	247mm	Luminous Efficacy	65lm/W
Housing Colour	Stainless Steel	Height	88mm	Beam Angle	110°
Lifetime	>30000H			Colour Temperature	3CCT 3000K / 4000K / 6500K
Mounting Type	Recessed			Colour Rendering Index	80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	6W	Type of Protection	IP65	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	ROHS	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK06	Warranty	3 YEARS
Operating Temperature	- 25° C to + 45° C				

SIZE

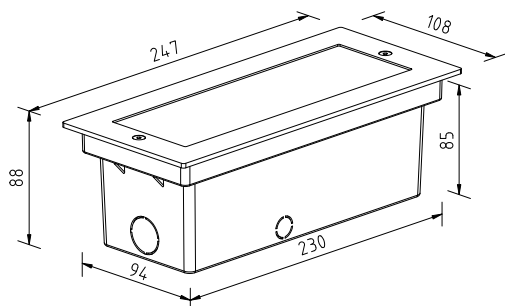

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

SKILL

6W 3CCT BRICK WHITE W/RECESSED BOX


ILAR-02942



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02942	Lenght	108mm	Total Luminous Flux	380lm
Body Material	PC+ABS housing, PC diffuser	Width	247mm	Luminous Efficacy	65lm/W
Housing Colour	White RAL 9016	Height	88mm	Beam Angle	110°
Lifetime	>30000H			Colour Temperature	3CCT 3000K / 4000K / 6500K
Mounting Type	Recessed			Colour Rendering Index	80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	6W	Type of Protection	IP65	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	ROHS	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK06	Warranty	3 YEARS
Operating Temperature	- 25° C to + 45° C				

SIZE

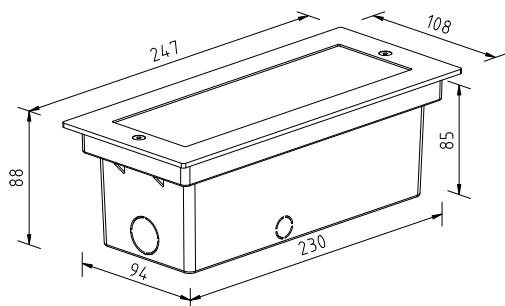

Designed by Aronlight in Portugal. Made in PRC



TECHNICAL INFORMATION

SKILL

6W 3CCT BRICK BLACK W/RECESSED BOX


ILAR-02943



REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02943	Lenght	108mm	Total Luminous Flux	380lm
Body Material	PC+ABS housing, PC diffuser	Width	247mm	Luminous Efficacy	65lm/W
Housing Colour	Black RAL 9005	Height	88mm	Beam Angle	110°
Lifetime	>30000H			Colour Temperature	3CCT 3000K / 4000K / 6500K
Mounting Type	Recessed			Colour Rendering Index	80

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	6W	Type of Protection	IP65	CE	YES
Nominal Voltage	220-240V	Protection Class	Class II	ROHS	YES
Operating Frequency	50/60Hz	Protection Class IK (shock resistance)	IK06	Warranty	3 YEARS
Operating Temperature	- 25° C to + 45° C				

SIZE

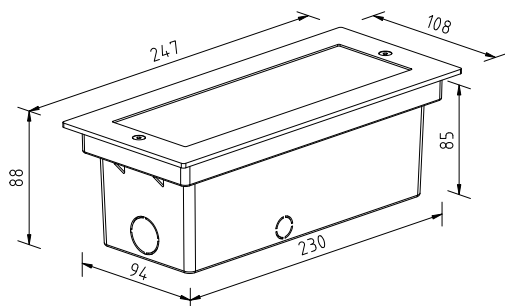

Designed by Aronlight in Portugal. Made in PRC

