

KBHR1260 12V 6,5Ah



The Kaise HR batteries were specially designed for applications that demand a very high energy output. With an optimized design of the grids and an excellent formula for pasting the plates, the HR series can deliver up to 40% more than the standard series.




Performance Characteristics

Nominal Voltage	12V	
Dimensions	Length (mm / inch)	151 / 5.94
	Width (mm / inch)	51 / 2.01
	Height (mm / inch)	93 / 3.66
	Total Height (mm / inch)	99 / 3.90
Approx Weight	(Kg / lbs)	1.82 / 4.01
Design Life	6~8 years	
Terminal	F1	
Container Material	ABS (UL94 HB or V-0 optional)	
Rated Capacity	6.50Ah / 0.325A	(20hr, 1.75V / cell, 25°C / 77°F)
	4.01Ah / 4.01A	(1hr, 1.70V / cell, 25°C / 77°F)
	3.39Ah / 6.79A	(30min, 1.70V / cell, 25°C / 77°F)
	2.90Ah / 11.6A	(15min, 1.70V / cell, 25°C / 77°F)
Internal Resistance	Approx. 25mΩ	

KBHR 1260 12V 6,5Ah



Charging Characteristics

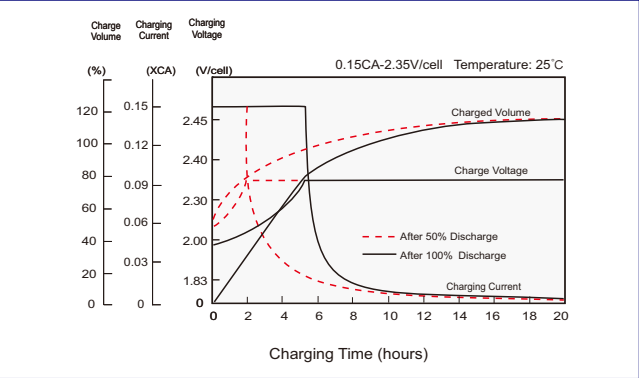

Discharge Characteristics

