

TECHNICAL INFORMATION

LARA

12W 4500K BRANCO

Aplique de Parede com luz direta integrada em placa de LED SMD.

Wall lamp with direct light integrated into a LED SMD board.

Aplique de pared con luz directa integrada en placa LED SMD


ILAR-00954




REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-00954	Lenght	Ø170mm	Total Luminous Flux	1250lm
LED Brand	SMD Led	Width	Ø170mm	Luminous Efficacy	105lm/W
Body Material	ABS + PC	Height	50mm	Beam Angle	120°
Housing Colour	White	Packaging Unit	20 pcs / carton	Colour Temperature	4500K
Nominal Lifetime (EOL end of life)	30000H	Gross Weight	-	Colour Rendering Index	>80
Surface / Recessed	Surface	Volume	-		
Dimmable	NO				
Installation	Surface				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	12W	Energy Label	A+	2014/30/EU (EMC Directive)	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz	Type of Protection	IP54	ROHS	YES
Operating Temperature	- 20° C to + 50° C	Protection Class	Class II	ENEC	NO
Starting Time 100% ON	0.000s	Protection Class IK (shock resistance)	IK6	Warranty	3 YEARS
ON/OFF Cycles	>20000				

SIZE

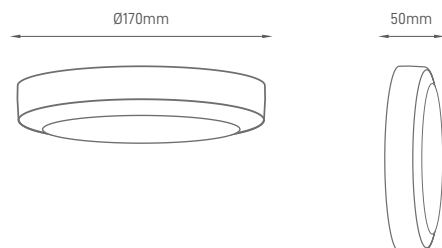

BEAM ANGLE



Designed by Aron Light in Portugal. Made in PRC

