

DSP5053 DSP5153 DSP5253**PA Speaker****Description**

This series of products is a multi-functional loudspeaker, available in wall-mounted, pendant, and floor types. This series of products can provide high-quality voice and music reproduction functions, and relatively long sound transmission distance. It is suitable for conference rooms, shopping malls, exhibition halls and other indoor and outdoor occasions.


Features

- Suitable for public address and background music playback.
- With clear and bright sound, bringing quality sound experience.
- Using high-quality PP material for drum paper of the speaker unit, rubber edge moisture-proof treatment, and silk dome tweeter for good sound quality and timber performance.
- Simple in appearance and shape, using fine round hole diffusion design for the mesh, beautiful and durable, so that the speaker can be perfectly integrated into any occasion.
- Using high-strength ABS material for the shell, sturdy and durable.
- Equipped with mounting bracket, easy to install.



Specifications

Model	DSP5053	DSP5153	DSP5253
Speaker Unit	5.25"×1+1"×1		
Rated Power (RMS)		30W	
Power Adjustment	70V 100V 8Ω	1.25W-2.5W-4W-8W-15W 2.5W-5W-8W-15W-30W 30W	
Sensitivity (1m, 1W)		86dB±2dB	
MAX. SPL. (1m)		101dB±2dB	
Frequency Response		110Hz~20kHz	
Dimensions (H×W×D)		Ø185×255mm	
Installation Method	Pendant	Wall-Mounted	Floor-standing
Weight		2.6kg	


Product Information

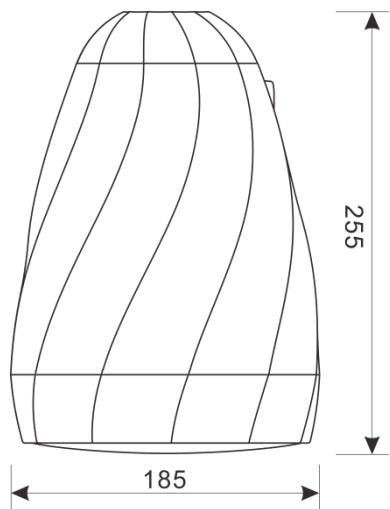


Frequency Response
(dB SPL, 1W, 1m)

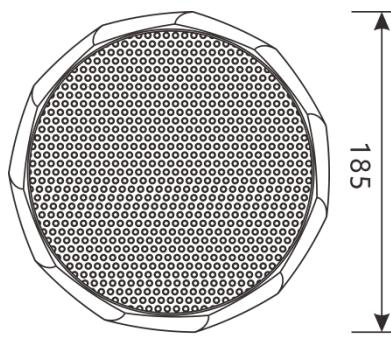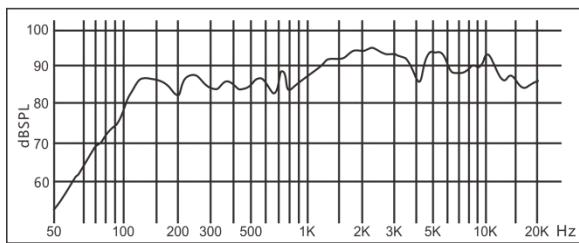

Distortion
(THD < 5% 1W, 1m, 100Hz-10kHz)

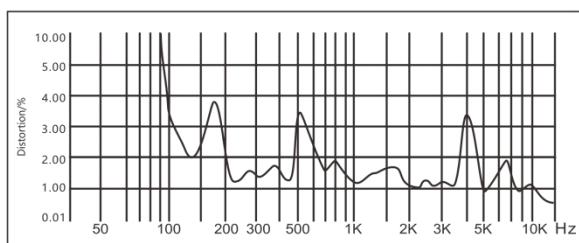

Directivity

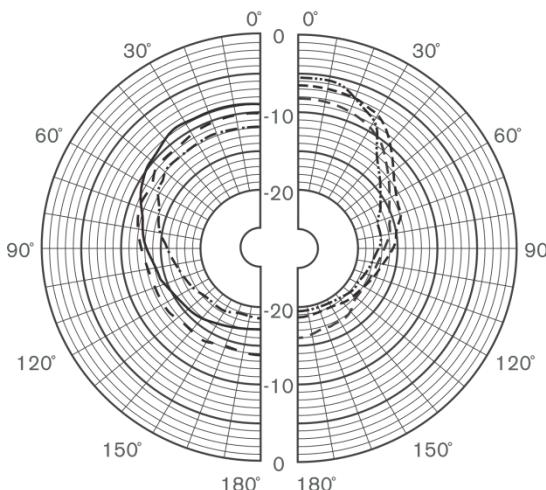

— · · · · 250 Hz — · · · · 2000 Hz
— - - - 500 Hz - - - - 4000 Hz
— — — — 1000 Hz — - - - - 8000 Hz